

NOVIK NEO



INTRODUCTION

Today, NOVIK is a leader brand in professional and commercial audio in America. Since its beginnings in Brazil during the year 1974, NOVIK began a long way of quality and reliability. It was during the 90's that it turned into the major manufacturer of speakers in Latin America, continuously focusing in accompanying its products with the most advanced technology and performance. A few years ago, NOVIK has become essential to create solutions for all areas of professional audio, supported by the high quality standards, investigation and development that characterizes the brand.

At present, NOVIK has developed new equipment lines that extend its product range beyond the imaginable, characterized by its functionality and exclusive designs. The new line of ultra slim powered consoles, class D amplifiers, portable sound systems and an endless number of original products provide solutions with the highest technology to the user. Through the years, NOVIK installed in America the concept of quality and condence in professional and commercial audio products, today, once again, it prints with investigation, development, functionality and technology these new products on the pages of Professional Audio of America.

INDEX

- 4. MIXER NVK 1602BT
- 6. MIXER NVK 1202BT
- 8. MIXER NVK 802BT
- 10. MIXER NVK 20MBT
- 12. MIXER NVK 16MBT
- 14. MIXER NVK 1200PBT
- 16. MIXER NVK 800PBT
- 18. NVK-108BT
- 19. NVK-106BT
- 20. NVK 8500/6400/4300BT
- 22. NOVOD SERIES
- 23. NOVO 160BT
- 24. NOVO SERIES
- 26. LIRIC SERIES
- 28. IN-WALL / CELLING
- 29. NVK 25
- 30. SNK-S3
- 31. EVO-460X
- 32. EVO-360X
- 33. EVO-260X
- 34. EVO-160X
- 35. EVO-110X
- 36. EVO 15P
- 38. STREETSOUND V
- 39. EVOD BRAVERY 215
- 40. EVO 410 HANDY
- 41. ROLLING SOUND
- 43. UNK 600
- 44. UNK 500
- 45. UNK 450
- 46. UNK 300
- 47. VNK 150
- 48. FNK 10
- 49. MICROPHONE
- 52. HNK-402
- 52. FNK-02U
- 53. MEGAPHONES
- 55. WOOFERS
- 58. DRIVERS
- 60. HORNS & CABINET
- 62. SYSTEM EXAMPLES

MIXER NVK 1602BT

16 CHANNELS

- NVK 1602BT combines multiple microphone and line inputs, 24Bit multi-FX processor and USB / SD MP3 player.
- Multipurpose mixer with Ultra-Slim and lightweight innovative design, enabling great convenience in operation, installation in small places and comfortable transportation.



Cod. 6000415

SPECIFICATIONS

- Built in MP3 player
- DSP with 99 internal effects
- 12 channels with pre-amplifiers of Mic
- Phantom Power (+48V)
- 4 stereo channels
- XLR and 1/4" metal Jack connector socket
- 8 Standard Connector 1/4" TRS type to insert
- 3 Bands Equalizer Per Channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity

MP3 INPUT

Through a data store device with USB or SD card connection, it can be reproduced the audio files in the console.



24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects.



00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Re	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	

INSERT

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

12 CHANNELS

With pre-amplifiers of Mic and Phantom Power (+48V).


4 CHANNELS

Stereo.





ULTRA SLIM MIXER

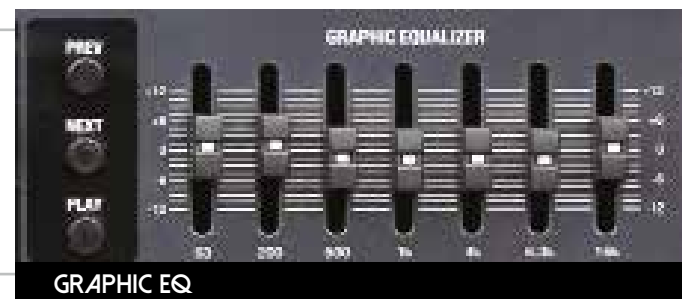

SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz- 20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA



PACKING INFO

MASTER DIMENSIONS: 515X475X355 MM / 20.3X18X14 IN
GROSS WEIGHT: 24.5 KG / 54.01 LB / MASTER PIECES: 5 PCS

MIXER NVK 1202BT

12 CHANNELS

- **NVK 1202BT** can mix 12 stereo and mic channels, 24Bit multi-FX processor and USB / SD MP3 player.
- It's a multipurpose mixer with Ultra-Slim and lightweight innovative design, enabling great convenience in operation, installation in small places and comfortable transportation.



Cod. 6000414

SPECIFICATIONS

- Built in MP3 player
- DSP with 99 internal effects
- 8 channels with pre-amplifiers of
- Mic and Phantom Power (+48V)
- 4 Stereo channels
- 4 Standard Connector 1/4" TRS type to insert
- 3 Bands Equalizer per channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL Function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity

MP3 INPUT

Through a data store device with USB or SD card connection, it can be reproduced the audio files in the console.



24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects.



00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Re	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	

INSERT

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

12 CHANNELS


With pre-amplifiers of Mic and Phantom Power (+48V).

4 CHANNELS

Stereo.



ULTRA SLIM MIXER

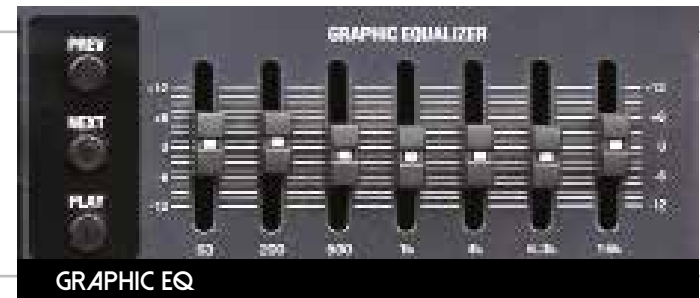

SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz- 20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA



PACKING INFO

MASTER DIMENSIONS: 515X475X355 MM / 20.3X18X14 IN
GROSS WEIGHT: 24.5 KG / 54.01 LB / MASTER PIECES: 5 PCS

MIXER NVK 802BT

8 CHANNELS

- NVK 802BT is a multipurpose mixer with Ultra-Slim and lightweight innovative design, can mix stereo and mic channels, 24Bit multi-FX processor and USB / SD MP3 player.
- Allows easy transportation and installation in small places.



Cod. 6000413



MIXER 8 CHANNELS

SPECIFICATIONS

- Built in MP3 player
- DSP with 99 internal effects
- 5 channels with pre-amplifiers of Mic and Phantom Power (+48V)
- 3 Stereo channels
- 3 Bands Equalizer per channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity

INSERT

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

5 CHANNELS

With pre-amplifiers of Mic and Phantom Power (+48V).

3 CHANNELS

Stereo.

ULTRA SLIM MIXER

MP3 INPUT

Through a data store device with USB or SD card connection, it can be reproduced the audio files in the console.



▲ SIDE VIEW




24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects.



00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Re	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	

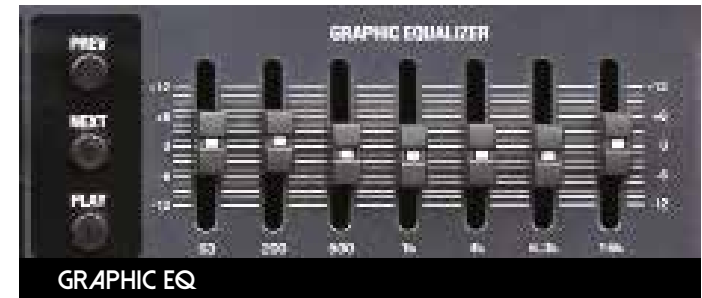

SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz- 20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA



PACKING INFO

MASTER DIMENSIONS: 515X475X355 MM / 20.3X18X14 IN
GROSS WEIGHT: 24.5 KG / 54.01 LB / MASTER PIECES: 5 PCS

MIXER NVK 20MBT

20 CHANNELS

- **20 CHANNELS AND LINE INPUTS**

For complex live performances and recording sessions it is very important to have multiple inputs and MIC preamps.

- **MP3 PLAYER WITH LCD DISPLAY AND INDIVIDUAL EQ**

Player compatible with les MP3, WAV and WMA and 2-bands EQ individual control to set the sound with precision.

- **STEREO SUB-GROUP OUTPUT**

Sub-mix grouping and sending to external effects, recording system or parallel mix.

- **AUXILIARY SENDS**

2 auxiliary sends pre-fader for monitoring system or external processing.

- **INSERT IN ALL CHANNELS**

It is usually used for dynamic processors, the signal is bridged with the connector fully inserted sending and receiving the signal simultaneously by the same line.

- **FX SEND AND RETURN**

FX send and return to connect an external effects processor or to an additional monitoring system.



Cod. 6000417



- The multi-use NVK 20MBT blends 20 MIC/LINE channels with individual 3-band EQ , AUX/FX sends and inserts in all channels.
- An essential versatile console to live-sound and studio recording.
- Digital FX Processor with 99 multiple effects and MP3 Player with individual EQ/level control to play all le types with precision.
- Robust and resistant construction suitable for installation in multiple spaces.



▲ BACK VIEW



▲ SIDE VIEW

SPECIFICATIONS

20 Channels with Phantom Power (+48V) and Microphone's preamplifier	Built-in MP3 player with LCD display and individual equalization	Faders for a balanced mix /// FX send and return
20 Line Inputs /// Insert in all channels	Compatible with memories USB and SD	Direct USB MP3 Recording
Bluetooth® Connectivity	Stereo sub-group output	Output to monitor through earphones with PFL function
3 Bands Equalizer And High Pass Filter Per Channel	3 auxiliary sendings of independent monitoring and effects	PFL and Mute functions per channel
Graphic stereo equalizer of 7 bands for the Master	DSP with 99 internal effects	Compatible with les MP3, WAV and WMA



MASTER GRAPHIC EQ

7-band graphic equalizer to obtain a balanced mix.



▲ FRONT VIEW

24-BIT MULTI-FX PROCESSOR

DSP WITH 99 INTERNAL EFFECTS



► Over 10 types of reverbs, multiple delays and effects combinations to provide color to the mix.

SPECIFICATIONS

Microphone Inputs	Type XLR balanced	Auxiliary Output	Type ¼" TRS unbalanced
Microphone Input Impedance	2.6k (balanced)	Auxiliary Output Impedance	120 (unbalanced)
Microphone max. Input level	12dBu (Min. gain @ 1kHz before clipping)	Auxiliary Output max. level	22dBu
Microphone TRIM gain range	5dB to 60dB	Main Outputs	Type XLR and ¼" TRS balanced
Line Inputs	Type ¼" TRS balanced	Main Output Impedance	120 (unbalanced)
Line Input Impedance	20k (balanced)	Main Output max. level	28dBu (balanced) / 22dBu (unbalanced)
Line max. input level	30dBu (Min. gain @ 1kHz before clipping)	Earphones Output	Type ¼" TRS unbalanced
Line TRIM gain range	-10dB to 40dB	Earphones Output max. level	19dBu / 150
Signal - Noise Ratio (S/N Ratio)	110dB / 112dB(A)	MP3 Player	
Distortion (THD+N)	0.005% / 0.004% (A weighing)	Compatible audio formats	MP3, WAV, WMA
Frequency Response	<10Hz-90kHz> 0dB/-1dB	DSP	
EQ per channel	Low 80 Hz (±15dB), Mid 2.5 kHz (±15dB), High 12 kHz (±15dB)	Converter	24 bit Sygma-Delta
High Pass Filter	100 Hz	Sample Frequency	40 kHz
	63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz y 16kHz (±12dB)	Power Supply	90V - 240V -- 60/50 Hz
		Energy Consumption	55W

00 Small Hall	44 Ambience	84 Phaser & Reverb
03 Mid Hall	48 Stadium	86 Pitch & Reverb
06 Big Hall	49 Ambience Fx	88 Delay & Reverb
09 Church	50 Delay	90 Delay & Gated
10 Small Room	59 Echo	91 Delay & Reverse
13 Mid Room	60 Chorus	92 Delay & Chorus
16 Big Room	66 Flanger	94 Delay & Flanger
19 Chapel	70 Phaser	96 Delay & Phaser
20 Plate	74 Pitch Shift	98 Delay & Pitch
27 Spring	80 Chorus & Reverb	
30 Gated Rev	82 Flanger & Reverb	
36 Reverse		
40 Early Re		

PACKING INFO

MASTER DIMENSIONS: 485X315X935 MM / 19.1X12.4X36.8 IN
GROSS WEIGHT: 25.2 KG / 55.56 LB / MASTER PIECES: 2 PCS

MIXER NVK 16MBT

16 CHANNELS



Cod. 6000416

- **16 CHANNELS AND LINE INPUTS**

For all kinds of live performances and recording sessions.

- **MP3 PLAYER WITH LCD DISPLAY AND INDIVIDUAL EQ**

Player compatible with les MP3, WAV and WMA and 2-bands EQ individual control to set the sound with precision.

- **STEREO SUB-GROUP OUTPUT**

Sub-mix grouping and sending to external effects, recording system or parallel mix.

- **AUXILIARY SENDS**

2 auxiliary sends pre-fader for monitoring system or external processing.

- **INSERT IN ALL CHANNELS**

It is usually used for dynamic processors, the signal is bridged with the connector fully inserted sending and receiving the signal simultaneously by the same line.

- **FX SEND AND RETURN**

FX send and return to connect an external effects processor or to an additional monitoring system.



- NVK 16MBT with robust and resistant construction, multiple MIC/LINE inputs, 3-bands EQ , AUX/FX sends and inserts in all channels, is the best option to use in xed and mobile live/recording sound systems.

- Digital FX Processor with 99 multiple effects and MP3 Player with individual EQ/level control to play all le types with precision.



▲ BACK VIEW



▲ SIDE VIEW

SPECIFICATIONS

16 Channels with Phantom Power (+48V) and Microphone's preamplifier	Built-in MP3 player with LCD display and individual equalization	Faders for a balanced mix /// FX send and return
16 Line Inputs /// Insert in all channels	Compatible with memories USB and SD	Direct USB MP3 Recording
Bluetooth® Connectivity	Stereo sub-group output	Output to monitor through earphones with PFL function
3 Bands Equalizer And High Pass Filter Per Channel	3 auxiliary sendings of independent monitoring and effects	PFL and Mute functions per channel
Graphic stereo equalizer of 7 bands for the Master	DSP with 99 internal effects	Compatible with les MP3, WAV and WMA



MASTER GRAPHIC EQ

7-band graphic equalizer to obtain a balanced mix.



▲ FRONT VIEW

24-BIT MULTI-FX PROCESSOR

DSP WITH 99 INTERNAL EFFECTS



▶ Over 10 types of reverbs, multiple delays and effects combinations to provide color to the mix.

SPECIFICATIONS

Microphone Inputs	Type XLR balanced	Auxiliary Output	Type ¼" TRS unbalanced
Microphone Input Impedance	2.6k (balanced)	Auxiliary Output Impedance	120 (unbalanced)
Microphone max. Input level	12dBu (Min. gain @ 1kHz before clipping)	Auxiliary Output max. level	22dBu
Microphone TRIM gain range	5dB to 60dB	Main Outputs	Type XLR and ¼" TRS balanced
Line Inputs	Type ¼" TRS balanced	Main Output Impedance	120 (unbalanced)
Line Input Impedance	20k (balanced)	Main Output max. level	28dBu (balanced) / 22dBu (unbalanced)
Line max. input level	30dBu (Min. gain @ 1kHz before clipping)	Earphones Output	Type ¼" TRS unbalanced
Line TRIM gain range	-10dB to 40dB	Earphones Output max. level	19dBu / 150
Signal - Noise Ratio (S/N Ratio)	110dB / 112dB(A)	MP3 Player	
Distortion (THD+N)	0.005% / 0.004% (A weighing)	Compatible audio formats	MP3, WAV, WMA
Frequency Response	<10Hz-90kHz> 0dB/-1dB	DSP	
EQ per channel	Low 80 Hz (±15dB), Mid 2.5 kHz (±15dB), High 12 kHz (±15dB)	Converter	24 bit Sigma-Delta
High Pass Filter	100 Hz	Sample Frequency	40 kHz
EQ Master	63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz y 16kHz (±12dB)	Power Supply	90V - 240V -- 60/50 Hz
		Energy Consumption	55W

00 Small Hall	44 Ambience	84 Phaser & Reverb
03 Mid Hall	48 Stadium	86 Pitch & Reverb
06 Big Hall	49 Ambience Fx	88 Delay & Reverb
09 Church	50 Delay	90 Delay & Gated
10 Small Room	59 Echo	91 Delay & Reverse
13 Mid Room	60 Chorus	92 Delay & Chorus
16 Big Room	66 Flanger	94 Delay & Flanger
19 Chapel	70 Phaser	96 Delay & Phaser
20 Plate	74 Pitch Shift	98 Delay & Pitch
27 Spring	80 Chorus & Reverb	
30 Gated Rev	82 Flanger & Reverb	
36 Reverse		
40 Early Re		

PACKING INFO

MASTER DIMENSIONS: 485X315X815 MM / 19.1X12.4X32.1 IN
GROSS WEIGHT: 23.06 KG / 52.03 LB / MASTER PIECES: 2 PCS

MIXER NVK 1200PBT

12 CHANNELS

- The NVK 1200PBT is designed with the concept of all in one, ready to work. 8 mic preamp, 2 stereo channels, DSP with internal Delay/Reverb effects and MP3 Player with display and individual controls, it is a perfect option for sound reinforcement in all places.


 **Bluetooth®**



Cod. 6000412

SPECIFICATIONS

600W+600W Program Power	8 channels with Phantom Power (+48V) and microphone preamplifier
1200W+1200W Peak Power	2 stereo balanced channels
DSP with internal effects (Delay / Reverb)	Powered to connect directly to the speakers
Built in MP3 player with display and individual equalization	Aux sends of monitoring/ effects (post-fader)
Compatible with MP3, WAV and WMA les.	Comfortable faders for balanced mixes
Bluetooth® Connectivity	PFL and Mute functions per channel
3 band Equalizer per channel	Peak LEDs in all channels
7 band Graphic Equalizer for the Master	Dual fader control of stereo master (L+R)
	Direct MP3 USB Recording

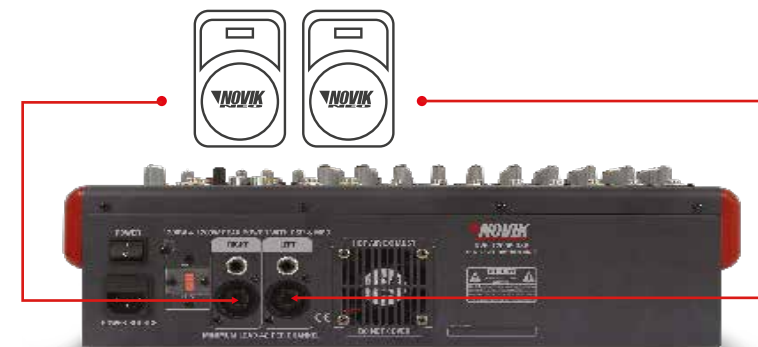

▲ POWERED TO CONNECT DIRECTLY TO THE SPEAKERS

▲ REAR VIEW



▶ FRONT VIEW

8 CHANNELS WITH PHANTOM POWER (+48V) AND MICROPHONE PREAMPLIFIER

SPECIFICATIONS

Microphone Input	Balanced XLR	Max. Aux Return input level	19dBu -- 6.8V (Min. gain @ 1kHz before clipping)
Microphone input impedance	2.6k (balanced)	Main Output	Type ¼" TRS balanced
Max. Mic input level	0.3dBu -- 80mV (Min. gain @ 1kHz before clipping)	Main output impedance	120 (unbalanced)
Microphone Gain Range	25dB (50mV IN @ 1kHz)	Max. Main Output level	28dBu (stereo) / 22dBu (simple channel)
Stereo lines input	Type ¼" TRS balanced	Phones Output	Type ¼" TRS unbalanced
Line input impedance	20k(balanced)	Max. Phones output level	22dBu
Max. Line input level	19dBu -- 6.8V (Min. gain @ 1kHz before clipping)	Powered output	Speakon
Line Gain range	20dB (700mV IN @ 1 kHz)	MP3 player compatible audio formats	MP3, WAV, WMA
Signal/Noise Ratio	111dB	DSP	
Distortion (THD+N)	0.005% curve A weighing	Converter	24 bit Sygma-Delta
Frequency Response	20Hz- 20kHz ±1.2dB	Sample Frequency	44.1 kHz
EQ Master	(63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz,16kHz) ±12dB	RMS Power (per channel)	300W @ 4
EQ by channel	Low 80 Hz ± 15dB/ Mid 2.5kHz ± 15dB / High 12kHz ±15dB	Program Power (per channel)	600W @ 4
Aux Send output	Type ¼" TS unbalanced	Peak Power (per channel)	1200W @ 4
Aux Send output impedance	120 (unbalanced)	Min. Charge Impedance per channel	4
Max. Aux Send level	22dBu	Power Supply	110V/220V ~ 60Hz/50 Hz
Aux. Return input	Tipo ¼" TS unbalanced	Energy Consumption	710 W
Aux. Return impedance	10 k (unbalanced)		



▲ Graphic EQ

▲ 2 stereo channels



▲ DSP with internal effects (Delay / Reverb)

▲ Built in MP3 player with display and individual equalization



PACKING INFO

MASTER DIMENSIONS: 755X370X522 MM / 29.7X14.6X20.6 IN

GROSS WEIGHT: 36 KG / 79.37 LB MASTER PIECES: 4 PCS

MIXER NVK 800PBT

8 CHANNELS

- The NVK 800PBT is a robust portable powered mixer with 4 mic preamp, 2 stereo channels, internal Delay/Reverb effects, MP3 Player with display and individual equalization, combines portability and great power.


 **Bluetooth®**



Cod. 6000411

SPECIFICATIONS

600W+600W Program Power	4 channels with Phantom Power (+48V) and microphone preamplifier
1200W+1200W Peak Power	2 stereo balanced channels
DSP with internal effects (Delay / Reverb)	Powered to connect directly to the speakers
Built in MP3 player with display and individual equalization	Aux sends of monitoring/ effects (post-fader)
Compatible with MP3, WAV and WMA les.	Comfortable faders for balanced mixes
3 bands Equalizer per channel	PFL and Mute functions per channel
7 bands Graphic Equalizer for the Master	Peak LEDs in all channels
Output to monitor through earphones with PFL function	Dual fader control of stereo master (L+R)
Bluetooth® Connectivity	Direct MP3 USB Recording

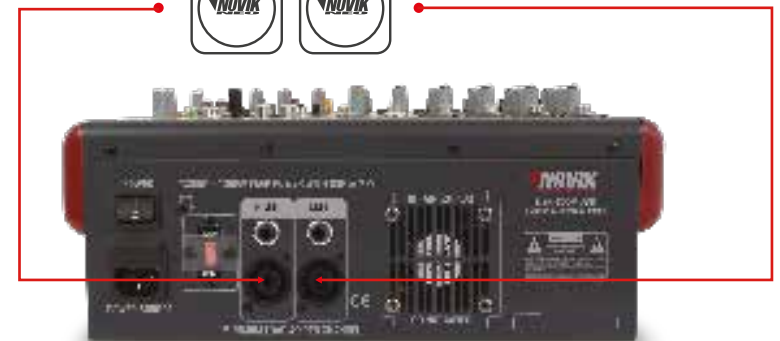

▲ POWERED TO CONNECT DIRECTLY TO THE SPEAKERS

▲ REAR VIEW



▶ FRONT VIEW

4 CHANNELS WITH PHANTOM POWER (+48V) AND MICROPHONE PREAMPLIFIER

SPECIFICATIONS

Microphone Input	Balanced XLR	Max. Aux Return input level	19dBu – 6.8V (Min. gain @ 1kHz before clipping)
Microphone input impedance	2.6k (balanced)	Main Output	Type ¼" TRS balanced
Max. Mic input level	0.3dBu – 800mV (Min. gain @ 1kHz before clipping)	Main output impedance	120 (unbalanced)
Microphone Gain Range	25dB (50mV IN @ 1kHz)	Max. Main Output level	28dBu (stereo) / 22dBu (simple channel)
Stereo lines input	Type ¼" TRS balanced	Phones Output	Type ¼" TRS unbalanced
Line input impedance	20k(balanced)	Max. Phones output level	22dBu
Max. Line input level	19dBu – 6.8V (Min. gain @ 1kHz before clipping)	Powered output	Speakon
Line Gain range	20dB (700mV IN @ 1 kHz)	MP3 player compatible audio formats	MP3, WAV, WMA
Signal/Noise Ratio	111dB	DSP	
Distortion (THD+N)	0.005% curve A weighing	Converter	24 bit Sigma-Delta
Frequency Response	20Hz- 20kHz ±1.2dB	Sample Frequency	44.1 kHz
EQ Master	(63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz, 16kHz) ±12dB	RMS Power (per channel)	300W @
EQ by channel	Low 80 Hz ±15dB / Mid 2.5kHz±15dB / High 12kHz ±15dB	Program Power (per channel)	600W @ 4
Aux Send output	Type ¼" TS unbalanced	Peak Power (per channel)	1200W @ 4
Aux Send output impedance	120 (unbalanced)	Min. Charge Impedance per channel	4
Max. Aux Send level	22dBu	Power Supply	110V/220V ~ 60Hz/50 Hz
Aux. Return input	Typo ¼" TS unbalanced	Energy Consumption	690 W
	10 k (unbalanced)		



▲ Graphic EQ



▲ 2 stereo channels



▲ DSP with internal effects (Delay / Reverb)



▲ Built in MP3 player with display and individual equalization



PACKING INFO

MASTER DIMENSIONS: 755X410X370 MM / 29.7X16.1X14.6 IN
GROSS WEIGHT: 30.5 KG / 66.25 LB MASTER PIECES: 4 PCS

NVK-108BT

PROFESSIONAL MIXER



SPECIFICATIONS

8 input channels	1 stereo input channel
USB Port	2-band equalizer per channel
MP3 Player	USB 2-in/2-out
XLR/TRS combo inputs	16 Digital Effects
+48V phantom power	TRS stereo main output
RCA stereo input	2-Track RCA output
Headphones output	4-LED vumeter

▶ **USB AUDIO INTERFACE**

▶ **8 INPUT CHANNELS**

▶ **16 DIGITAL FX**



**LCD
DISPLAY**



**2 BAND
EQ**



**USB
REC & PLAY**



**+48V
PHANTOM
POWER**

PACKING INFO

MASTER DIMENSIONS: 552X240X450 MM / 21.3X9.44X17.7 IN
GROSS WEIGHT: 10 KG / 22 LB / MASTER PIECES: 10 PCS

Cod Y. 6000912




Cod R. 6000910

Cod R. 6000911

NVK-106BT

PROFESSIONAL MIXER

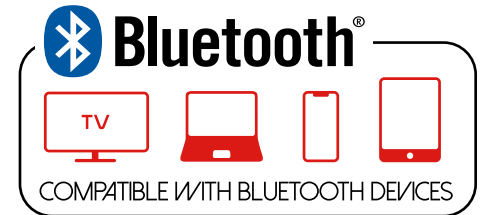

SPECIFICATIONS

6 input channels	1 stereo input channel
USB Port	2-band equalizer per channel
MP3 Player	USB 2-in/2-out
XLR/TRS combo inputs	16 Digital Effects
+48V phantom power	TRS stereo main output
RCA stereo input	2-Track RCA output
Headphones output	4-LED vumeter

PACKING INFO

MASTER DIMENSIONS: 450X240X450 MM / 17.7X9.4X17.7 IN
GROSS WEIGHT: 8 KG / 17.6 LB / MASTER PIECES: 10 PCS



▶ 16 DIGITAL FX

▶ 6 INPUT CHANNELS

▶ USB AUDIO INTERFACE

MIXERS NVK-8500BT / NVK-6400BT / NVK-4300BT

- The NVK Powered Mixer Series designed for any application with a durable and rugged construction, ready to work with ultra-silence preamps.
- Offers MP3 Player, Bluetooth® function, USB/SD memories receptor. Digital Delay assigned to each channel. It's a perfect option for sound reinforcement in any places.

▶ **ULTRA-SILENCE PRE-AMPLIFIERS**

▶ **FX DIGITAL DELAY**



SPECIFICATIONS

Multi-channel powered mixer

MP3 player / USB/SD connector

Bluetooth®

LCD display

Remote control

XLR Balanced Mic Inputs

1/4" jack & RCA Line Inputs / SUB Out

CD / Tape in / REC Out

2-Band EQ on each channel

Effect control on each channel

Effect level, time, repeat control in Master

5-band graphic equalizer in Master



REMOTE CONTROL




HANDLE FOR EASY TRANSPORT



ULTRA-SILENCE PRE-AMPLIFIER

SPECIFICATIONS

	NV/K-8500BT <small>Cod. 6000408</small>	NV/K-6400BT <small>Cod. 6000410</small>	NV/K-4300BT <small>Cod. 6000409</small>
Microphone Input	Balanced XLR x8	Balanced XLR x6	Balanced XLR x4
Microphone input impedance	2.6k (balanced)	2.6k (balanced)	2.6k (balanced)
Max. Mic input level	+12 dBu @ +10 dB gain	+12 dBu @ +10 dB gain	+12 dBu @ +10 dB gain
Microphone Gain Range	+10 to +60 dB	+10 to +60 dB	+10 to +60 dB
Line input	Balanced 1/4" TRS x8	Balanced 1/4" TRS x6	Balanced 1/4" TRS x4
Line input impedance	20k(balanced)	20k(balanced)	20k(balanced)
Max. Line input level	19dBu -- 6.8V (Min. gain @ 1kHz before clipping)	19dBu -- 6.8V (Min. gain @ 1kHz before clipping)	19dBu -- 6.8V (Min. gain @ 1kHz before clipping)
Line Gain range	+22 dBu@ 0 dB Gain	+22 dBu@ 0 dB Gain	+22 dBu@ 0 dB Gain
Signal/Noise Ratio	111dB	111dB	111dB
Distortion (THD+N)	0.005% / 0.004% curve A weighing	0.005% / 0.004% curve A weighing	0.005% / 0.004% curve A weighing
Frequency Response	<10 Hz -150 kHz (-1 dB)	<10 Hz -150 kHz (-1 dB)	<10 Hz -150 kHz (-1 dB)
EQ Master	(60Hz, 250Hz, 1kHz, 4kHz,12kHz) ±12dB	(60Hz, 250Hz, 1kHz, 4kHz,12kHz) ±12dB	(60Hz, 250Hz, 1kHz, 4kHz,12kHz) ±12dB
EQ by channel	Low 60 Hz ± 15dB/ High 10kHz ±15dB	Low 60 Hz ± 15dB/ High 10kHz ±15dB	Low 60 Hz ± 15dB/ High 10kHz ±15dB
Main Output	Type 1/4" TRS balanced	Type 1/4" TRS balanced	Type 1/4" TRS balanced
Digital effect	Delay	Delay	Delay
MP3 Player	Yes	Yes	Yes
Compatible audio formats	MP3, WAV, WMA	MP3, WAV, WMA	MP3, WAV, WMA
RMS Power	250W @ 4	200W @ 4	150W @ 4
Program Power	500W @ 4	400W @ 4	300W @ 4
Peak Power	1000W @ 4	800W @ 4	600W @ 4
Min. Charge Impedance per channel	4	4	4
Power Supply	110V/220V ~ 60Hz/50 Hz 500 W	110V/220V ~ 60Hz/50 Hz 400 W	110V/220V ~ 60Hz/50 Hz 300 W

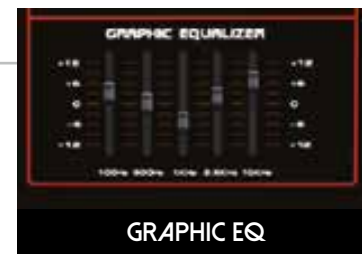

GRAPHIC EQ



MP3 PLAYER

PACKING INFO

NVK 8500BT

MASTER DIMENSIONS: 525X295X560 MM / 20.7X11.6X22 IN
GROSS WEIGHT: 21.6 KG / 46.30 LB / MASTER PIECES: 2 PCS

NVK 6400BT

MASTER DIMENSIONS: 460X290X530 MM / 18.1X11.4X20.9 IN
GROSS WEIGHT: 19 KG / 41.89 LB / MASTER PIECES: 2 PCS

NVK 4300BT

MASTER DIMENSIONS: 545X295X390 MM / 21.5X11.6X15.4 IN
GROSS WEIGHT: 17 KG / 37.48 LB / MASTER PIECES: 2 PCS

NOVOD SERIES

HIGH PERFORMANCE AMPLIFIER

- Thanks to the innovative Class D design the NOVOD amplifiers are able to provide you with enormous power and incredible sonic performance in ultra-portable and lightweight package.

SPECIFICATIONS	NOVOD 2600 <small>Cod. 6000506</small>	NOVOD 1600 <small>Cod. 6000505</small>
Input connectors	XLR	XLR
Output connectors	Speakon	Speakon
Input impedance	20k - Balanced, 10k un-Balanced	20k - Balanced, 10k un-Balanced
Output connections type	Stereo & Bridge Output	Stereo & Bridge Output
Amplifier type	Class D	Class D
Frequency Response	5Hz - 30kHz \pm 1dB	20Hz-30kHz \pm 1dB
S/N Ratio	100dB	96dB
THD	0.03% (8ohm/1KHz/half power)	0.07% (8ohm/1KHz/half power)
Crosstalk	80 dB @ Rated Output/8/1kHz	82 dB @ Rated Output/8/1kHz
Damping Factor	1000 @ 8/1kHz	700 @ 8/1kHz
Slew Rate	20 V/ μ S	15 V/ μ S
Stereo Output Power (8)	600 W + 600 W	375 W + 375 W
Stereo Output Power (4)	1200 W + 1200 W	750 W + 750 W
Bridge Output Power (8)	2400 W	1500 W
Minimum Impedance load 4		4
Cooling System	Active cooling fan	Active cooling fan
Protection	Soft Start, Short Circuit, Limiter, DC Fault, AC Line Fuse, Thermal Cut	Soft Start, Short Circuit, Limiter, DC Fault, AC Line Fuse, Thermal Cut
Main Power Supply	AC 115/230 V - 60/50 Hz - Power Source Switching 2750W	AC 115/230 V - 60/50 Hz - Power Source Switching 1625W



PACKING INFO


NOVOD 2600

MASTER DIMENSIONS: 530X400X160 MM / 20.5X15.7X6.3 IN
GROSS WEIGHT: 6.12 KG / 13.49 LB / MASTER PIECES: 1 PCS

NOVOD 1600

MASTER DIMENSIONS: 530X360X170 MM / 20.9X14.2X6.7 IN
GROSS WEIGHT: 5.71 KG / 12.59 LB / MASTER PIECES: 1 PCS

POWER FOR ALL THE SOUNDS

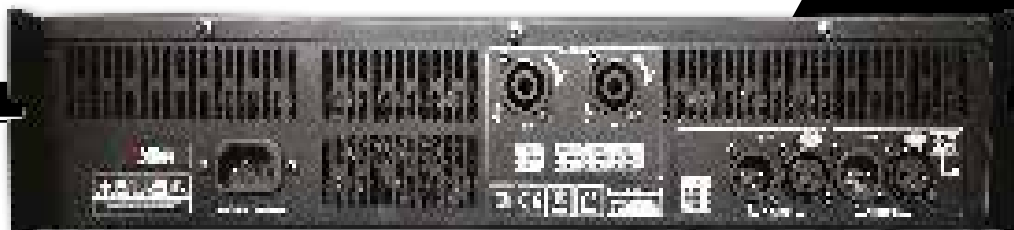

▲ Stereo and bridge mode /
Xlr input / speakon outputs

▲ Connectors

FEATURES

- Superior Class D technology
- Maximum quality and power
- Less weight and less consumption for extra efficiency
- Auto-Limiter offers high gain output signals without distortion
- Thermal cut and short circuit protection
- XLR inputs
- Speakon Outputs
- Soft-Start



Cod. 6000508

NOVO i60BT P.A. POWERED MIXER

▶ 60W RMS

SPECIFICATIONS

RMS Output power 60W	Input sensitivity-20dB	Frequency Response 20Hz-20Khz
3 Channel	MP3 player system with USB	T.H.D 0.8%
Mic Input	Bluetooth®	S/N Ratio <75dB
Input sensitivity-42dB	Speaker Output 4ohm, 8ohm, 16ohm	Power supply 100-230V~60/50Hz
1 Aux Input	Line output 100V	



▶ USB MP3 PLAYER

▶ 3 INPUT CHANNELS

▶ 100V OUTPUT

PACKING INFO

MASTER DIMENSIONS: 541X321X535 MM / 21.2X12.6X21.06 IN
GROSS WEIGHT: 19 KG / 41.8 LB / MASTER PIECES: 10 PCS

NOVO SERIES

VERSATILE POWER AMPLIFIER

- The NOVO series is a multi-purpose power amplifier. Designed to concerts, bars, clubs, houses of worship, convention centers and many others applications provided the best sound quality. Technology, design and reliability characterize NOVO Series through the years.



▶ NOVO 2500

Stereo / parallel / bridge-mono mode.
 User selectable input sensitivity: -0.77V and 1.4V
 XLR and TRS inputs; Speakon® and binding post outputs.
 LCD Screen; channel temperature; protect, clip and signal presence LED.
 Two turbo cooling grilles.

SPECIFICATIONS

RMS output power 8 ohm / Bridge: 2500W

RMS output power 4 ohm: 1250W

RMS output power 8 ohm: 1000W

Frequency Response: 20 Hz- 20KHz, +1/ -1dB

Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz

Input Impedance: 20 k Balanced & 10 k un-Balanced

S/N Rate: >85 dB

Channel crosstalk at rated power output: >58dB

Damping factor: >300

Power supply: AC 115/230V 60Hz/50Hz

Dimensions (WxDxH): 19" x 16.1" x 3.5"

(482mm x 410mm x 88mm)

Weight: 16, 2 kg (35lb)



▲ FRONT VIEW



▲ REAR VIEW



▲ STEREO MODE
TWO CHANNEL TEMPERATURE



▲ PARALLEL MODE
TWO CHANNEL TEMPERATURE



▲ BRIDGE MODE
TWO CHANNEL TEMPERATURE

PACKING INFO

MASTER DIMENSIONS: 482X386X890 MM / 19X15.2X35 IN
 GROSS WEIGHT: 16.2 KG / 33.71 LB / MASTER PIECES: 1 PCS



FRONT VIEW

▶ NOVO 1500

Stereo / parallel / bridge-mono mode.
 User selectable input sensitivity: -0.77V and 1.4V
 XLR and TRS inputs; Speakon® and binding post outputs.
 Mode, protect, clip and signal presence LED.
 Two turbo cooling grilles.

▶ NOVO 900-500

Stereo / parallel / bridge-mono mode.
 User selectable input sensitivity: -0.77V and 1.4V
 RCA, XLR and TRS inputs; Speakon® and binding post outputs.
 Mode, protect, clip and signal presence LED.
 Two level controls and limiter.

SPECIFICATIONS

NOVO 1500 Cod. 6000502

RMS output power 8 ohm / Bridge: 1500W

RMS output power 4 ohm: 750W

RMS output power 8 ohm: 600W

Frequency Response: 20 Hz- 20KHz, +1/ -1dB

Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz

Input Impedance: 20 k Balanced & 10 k un-Balanced

S/N Rate: >85 dB

Channel crosstalk at rated power output: >58dB

Damping factor: >300

Power supply: AC 115/230V 60Hz/50Hz

Dimensions (WxDxH): 19" x 15.6" x 3.5" (482mm x

395mm x 88mm)

Weight: 15, 5 kg (34lb)V

NOVO 900 Cod. 6000502

RMS output power 8 ohm / Bridge: 900W

RMS output power 4 ohm: 450W

RMS output power 8 ohm: 300W

Frequency Response: 20 Hz- 20KHz, +1/ -1dB

Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz

Input Impedance: 20 k Balanced & 10 k un-Balanced

S/N Rate: >85 dB

Channel crosstalk at rated power output: >58dB

Damping factor: >300

Power supply: AC 115/230V 60Hz/50Hz

Dimensions (WxDxH): 19" x 12.5" x 3.5" (482mm x

317mm x 88mm)

Weight: 10,1 kg (22lb)

NOVO 500 Cod. 6000501

RMS output power 8 ohm / Bridge: 500W

RMS output power 4 ohm: 250W

RMS output power 8 ohm: 150W

Frequency Response: 20 Hz- 20KHz, +1/ -1dB

Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz

Input Impedance: 20 k Balanced & 10 k un-Balanced

S/N Rate: >85 dB

Channel crosstalk at rated power output: >58dB

Damping factor: >300

Power supply: AC 115/230V 60Hz/50Hz

Dimensions (WxDxH): 19" x 12.5" x 3.5" (482mm x

317mm x 88mm)

Weight: 8,6 kg (18lb)

PACKING INFO

NOVO 1500

MASTER DIMENSIONS: 482X386X890 MM / 19X15.2X35 IN

GROSS WEIGHT: 15,5 KG / 34,17 LB / MASTER PIECES: 1 PCS

NOVO 900

MASTER DIMENSIONS: 482X386X890 MM / 19X15.2X35 IN

GROSS WEIGHT: 10,1 KG / 22,27 LB / MASTER PIECES: 1 PCS

NOVO 500

MASTER DIMENSIONS: 482X386X890 MM / 19X15.2X35 IN

GROSS WEIGHT: 8,6 KG / 18,96 LB / MASTER PIECES: 1 PCS

LIRIC SERIES

SURFACE MOUNT SPEAKERS

- The LIRIC Series is pure NOVIK NEO style, combining high performance, compact design and rugged construction into a line of loudspeaker systems with unprecedented versatility and one of the easiest systems to install available anywhere.
- Perfect for applications where tight corners and tough angles are all too common, the LIRIC 5, 6 & 8 features a wide variety of available mounting systems allowing enclosures to be easily positioned for optimum performance.
- Don't be fooled by the small size. The LIRIC is big on features and sound quality.



W Cod. 6000053



LIRIC 5 Cod. 6000050




LIRIC 8 Cod. 6000052
W Cod. 6000055



LIRIC 6 Cod. 6000051
W Cod. 6000054



Dimensions

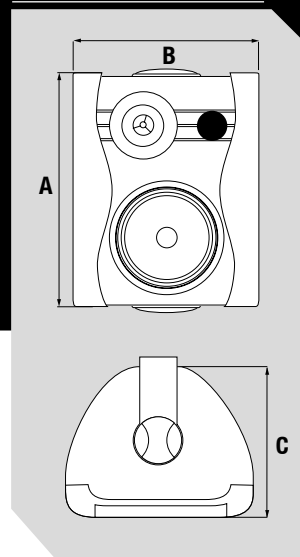

Full range configuration.

HIGH PERFORMANCE SMALL SIZE SOUND QUALITY

SPECIFICATIONS

	LIRIC 8	LIRIC 6	LIRIC 5
Ways:	2	2	2
Bass speaker unit:	8"	6.5"	5"
Frequency response:	60Hz-20KHz	80Hz-20KHz	100Hz-20KHz
Sensitivity:	92dB (SPL 1w/1m)	89dB (SPL 1w/1m)	88dB (SPL 1w/1m)
RMS power:	125W	100W	40W
Continuous power:	250W	200W	80W
Peak power handling:	500W	400W	160W
Impedance:	8 Ohms	8 Ohms	8 Ohms
Dimensions:	A 355 x B 270 x C 220 mm A 10.6 x B 14 x C 8.7"	A 290 x B 210 x C 170 mm A 8.3 x B 11.4 x C 6.7"	A 240 x B 180 x C 140 mm A 7.1 x B 9.45 x C 5.5"
Weight:	12.1lb (5.5Kg) Coil-diameter: 1.4" (35mm) Coil-diameter: 2.5" (63mm)	7.7lb (3.5Kg) Coil-diameter: 1" (25mm) Hi: Coil-diameter: 2" (50mm)	5.5lb (2.5Kg) Coil-diameter: 1" (25.5mm) Hi: Coil-diameter: 1/2" (13.28mm)




TWEETER



CONNECTORS



8" WOOFER

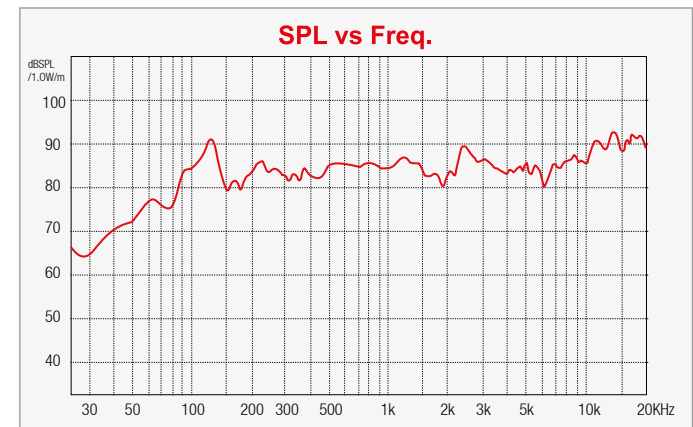

LIRIC 8

PACKING INFO

LIRIC 8

MASTER DIMENSIONS: 436X330X552 MM / 17.2X13X21.7 IN
GROSS WEIGHT: 14 KG / 30.86 LB / MASTER PIECES: 1 PCS

LIRIC 6

MASTER DIMENSIONS: 380X452X550 MM / 15X17.8X21.7 IN
GROSS WEIGHT: 16.7 KG / 36.82 LB / MASTER PIECES: 2 PCS

LIRIC 5

MASTER DIMENSIONS: 330X396X442 MM / 13X15.6X17.4 IN
GROSS WEIGHT: 11.1 KG / 24.47 LB / MASTER PIECES: 2 PCS



HANDLE CONTROL


IN-WALL / CEILING SPEAKERS

- The in-ceiling series combines modern design and great audio to satisfy those seeking high quality audio playbacks.
- Wide frequency range, deep bass, clear and dented treble are combined with a suitable design to install in any wall or ceiling prioritizing the excellent esthetics of the enclosure.
- Ceiling speakers is made of high quality materials to ensure the best performance, a robust structure with protection grid and easy installation system.



► WRC 8160 DIMENSIONS

Easily installation both in-wall and in ceiling.

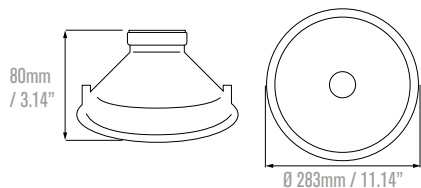

► NWS 5100: 5" ► NWS 6120: 6"






Transformer for use of 70V/100V distributed lines.

SPECIFICATIONS

	Cod. 6000042 NWS 8160	Cod. 6000041 NWS 6120	Cod. 6000040 NWS 5100
Ceiling speaker components:	8" Full range	6" Full range	5" Full range
Frequency response:	45Hz~20KHz	65Hz~20KHz	80Hz~20KHz
Sensitivity:	93dB (+/-2dB)	91dB (+/-2dB)	88dB (+/-2dB)
Impedance:	8 Ohm	8 Ohm	8 Ohm
RMS power:	15W/7,5W/5W	8W	5W
Program power:	30W/15W/10W	16W	10W
Max power:	60W/30W/20W	32W	20W

WALL REMOTE CONTROL

 <p>► WRC 40 Cod. 600049 POWER: 40W Adjusting: Transformer</p>	 <p>► WRC 30 Cod. 600048 POWER: 30W Adjusting: Transformer</p>	 <p>► WRC 5 Cod. 600047 POWER: 5W Adjusting: Potentiometer</p>
--	--	--

PACKING INFO

NWS 8160
MASTER DIMENSIONS: 785X320X275 MM / 30.9X12.6X10.8 IN GROSS WEIGHT: 18 KG / 39.68 LB / MASTER PIECES: 10 PCS
NWS 6120
MASTER DIMENSIONS: 415X380X415 MM / 16.2X14.8X16.2 IN GROSS WEIGHT: 12.5 KG / 26.4 LB / MASTER PIECES: 20 PCS
NWS 5100
MASTER DIMENSIONS: 270X350X370 MM / 14.4X13.7X14.4 IN GROSS WEIGHT: 10.5 KG / 22 LB / MASTER PIECES: 20 PCS

NVK 25

WALL MOUNT SPEAKERS



▲ ALSO IN WHITE

Cod bk. 6000076 / Cod w. 6000077


- Full-range systems designed to ensure excellent audio playback quality.
- Wide range of frequencies covered due to its three-way amplification. Includes two Mylar Dome tweeters for high and mid frequencies, and 4" Mica woofer for deep and powerful bass.
- Its design is also characterized by the simple mounting system that provides, adapted to mount on any wall, column and angle in homes, businesses, restaurants, bars and any other places.
- Even though it's small, it provides high power!

SPECIFICATIONS

Configurations: 2 Ways	Weight: 8oz
Woofer size: 102mm (4")	HF Tweeter size: 25mm (1")
Frequency response: 80Hz-21KHz	Tweeter material: Mylar Dome
Sensibility: 88dB (SPL 1w/1m)	Magnet weight (TW): 2oz
RMS power: 50W	Box material: ABS
Program power: 100W	Support: Included
Peak power: 200W	Colors: Black or white
Impedance: 8 Ohm	Dimensions (HxWxD): 21x14x12 cm (8.3x5.5x4.8")
Woofer material: Mica	



◀ Can be easily adjusted at your desired position to provide the best sound direction.



PACKING INFO

MASTER DIMENSIONS: 785X320X275 MM / 30.9X12.6X10.8 IN
GROSS WEIGHT: 19 KG / 41.89 LB / MASTER PIECES: 6 PCS



SNK-S3

SPEAKER STAND

▶ 1800W

- The snk-s3 is a strong, durable, rugged and convenient for you to carry. Heavy duty steel construction, easy to set up.

▶ MATERIAL: STEEL

▶ WEIGHT: 7.60 LB

▶ BLACK COLOR



SPECIFICATIONS

Height adjust.: 43.30-73.62 in

Load capacity: 132.27 lb

Weight: 7.60 lb

Upper shaft tubing: 35mm / Color: Black

Material: Steel



PACKING INFO

SNK-S3

MASTER DIMENSIONS: 365X315X103 MM / 14.4X12.4X40.5 IN

GROSS WEIGHT: 17.7 KG / 39 LB MASTER PIECES: 4 PCS

EVO-460X

AMPLIFIED LOUDSPEAKER

▶ 1400W



Cod. 6000705 / R Cod. 6000132

▶ TWS

▶ 3 CHANNEL MIXER

▶ 15" WOOFER

▶ 1.75" DRIVER

FEATURES

- 5 band EQ
- Bluetooth®
- 3 channel mixer
- XLR/jack ¼" MIC input / XLR/RCA line input
- XLR/ Jack ¼" Output
- Master volume control
- 1400W Max. Power
- Side handles for easy movement

- These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.
- EVO Series offers a complete system of mixing and playback, 3-channel, MIC and Line inputs for the most sophisticated situations.

 **Bluetooth®**

SPECIFICATIONS

ACTIVE Two way enclosure	Master Section: Graphic EQ / Master Volume
Power Amp:	Line Out XLR and Jack 1/4" connectors
350W RMS / 700W Program / 1400W Peak	Frequency Response: 40Hz-18KHz
Built in 4 Channel Mixer:	Maximum SPL: 125 dB
Ch 1 Player with Full Control	Woofers: 15" / Magnet 50 Oz / 2,5" Kapton voice coil
Ch 2 microphone input with XLR/Jack 1/4" connectors	Driver 1" / 1,75" Voice Coil
Ch 3 microphone input with XLR/1/4" connectors	Horn 90°x60°
Ch 4 line input with XLR/RCA connectors	(W)20.86in x (D)18.70in x (H)30.11in
Level Control	Weight: 57.32 lb

PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
GROSS WEIGHT: 25 KG / 55.12 LB / MASTER PIECES: 1 PCS



EVO-360X

AMPLIFIED LOUDSPEAKER

▶ 1000W

- These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.
- EVO Series offers a complete system of mixing and playback, 4-channel, MIC and Line inputs for the most sophisticated situations.

▶ TWS

▶ 4 CHANNEL MIXER

▶ 15" WOOFER

▶ 1" DRIVER



SPECIFICATIONS

ACTIVE Two way enclosure &	Volume
Built-in MP3 Player	Line Out XLR and Jack 1/4" connectors
Built in Power Amp:	Frequency Response: 40Hz-18KHz
250W RMS / 500W Program / 1000W Peak	Maximum SPL: 125 dB
Built in 4 Channel Mixer:	Woofer: 15" / Magnet 50 Oz / 2,5" Kapton voice coil
Ch 1 Bluetooth Player	coil
Ch 2 microphone input with XLR	Driver 1" / 1,75" Voice Coil
Ch 3 microphone input with 1/4" connector	Horn 90°x60°
Ch 4 line input with XLR/RCA/3.5mm connectors	Dimensions: (W)20.86in x (D)18.70in x (H)30.11in
Level Control	
Master Section: Bass & Treble EQ / Master	Weight: 57.32 lb

FEATURES

- Bluetooth®
- 4 channel mixer
- XLR/jack 1/4" MIC input / XLR/RCA line input
- XLR/ Jack 1/4" line output
- Master volume control
- 1000W Max. Power
- Side handles for easy movement



Cod. 6000705 / R Cod. 6000132



PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
GROSS WEIGHT: 25 KG / 55.12 LB / MASTER PIECES: 1 PCS

EVO-260X

AMPLIFIED LOUDSPEAKER

▶ 1000W



Cod. 6000705 / R Cod. 6000132

- These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.
- EVO Series offers a complete system of mixing and playback, 3-channel, MIC and Line inputs for the most sophisticated situations.



SPECIFICATIONS

Configuration: ACTIVE	Frequency Response: 45Hz - 18kHz
Two way enclosure with	Sensitivity: 94 dB
Power Amp: 250W RMS / 500W Program /	Maximum SPL: 121dB
1000W Peak	Low frequency woofer: 12"Ø / Magnet 40
Built in 3 Channel Mixer:	Oz /
Ch 1 Bluetooth Player with full control	2" Kapton voice coil
Ch 2 XLR/ Jack 1/4" Mic input with Echo and volume control	High frequency driver: Custom Driver 1" / 1,35" Voice Coil
Ch 3 XLR/RCA/1/8" Line input	Horn 90°x50°
Master Volume	Dimensions: (W)460mm x (D)375mm x (H)660mm
Line Out Jack 1/4" connector	Weight: 50.7 lb
Speakon powered output	

▶ TWS

▶ 3 CHANNEL MIXER

▶ 12" WOOFER

▶ 1" DRIVER

FEATURES

- Powered output to passive speaker
- Bluetooth®
- 3 channel mixer
- Microphone Input
- Line Input
- Line Output
- Master volume control
- 1000W Max. Power
- Side handles for easy movement

PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
GROSS WEIGHT: 25 KG / 55.12 LB / MASTER PIECES: 1 PCS



EVO-160X

AMPLIFIED LOUDSPEAKER

▶ 600W

- These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.
- EVO Series offers a complete system of mixing and playback, 3-channel, MIC and Line inputs for the most sophisticated situations.

▶ TWS

▶ 3 CHANNEL MIXER

▶ 10" WOOFER

▶ 1" DRIVER



SPECIFICATIONS

Configuration: ACTIVE Two way enclosure	Frequency Response: 55Hz-18KHz
Power Amp: 150W RMS / 300W Program / 600W	Maximum SPL: 120 dB
Peak	Low frequency woofer: 10"/Magnet 30 Oz/1,5"
3 Channel Mixer:	Kapton V.C.
Ch 1 Mic Input with XLR and Jack 1/4"	Driver 1" / 1,34" Voice Coil
Ch 2 Line Input with XLR and Left & Right RCA	Horn: 90°x60°
Ch 3 Bluetooth® player	Dimensions: (W)16.14in x (D)12.79in x
Master Section: bass and treble EQ / Master	(H)21.85in
Volume	Weight: 25.35 lb
Line Out Jack 1/4" connector	

FEATURES

- Bluetooth®
- 3 channel mixer
- XLR/jack 1/4" MIC input / XLR/RCA line input
- 1/4" line out
- EQ Treble - Bass (+-12dB)
- 600W Max. Power
- Side handles for easy movement



Cod. 6000705 / R Cod. 6000132



PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
GROSS WEIGHT: 25 KG / 55.12 LB / MASTER PIECES: 1 PCS

EVO-110X

AMPLIFIED LOUDSPEAKER

▶ 400W



Cod. 6000705 / R Cod. 6000132

▶ 3 CHANNEL MIXER

▶ 8" WOOFER

▶ 1" DRIVER

FEATURES

- Bluetooth®
- 3 channel mixer
- Jack 1/4" MIC input / RCA and XLR line input
- 1/4" line out
- EQ Treble - Bass (+-12dB)
- 400W Max. Power

- These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.
- EVO Series offers a complete system of mixing and playback, 4-channel, MIC and Line inputs for the most sophisticated situations.



SPECIFICATIONS

Configuration: ACTIVE Two way enclosure	Frequency Response: 65Hz-18KHz
Power Amp: 100W RMS / 200W Program	Maximum SPL: 118 dB
/400W Peak	Low frequency woofer: 8" / Magnet 30 Oz /
Built in 3 Channel Mixer:	1,5" Kapton V.C.
Ch 1 Microphone Input with Jack 1/4"	Driver 1" / 1" Voice Coil
Ch 2 Line Input with XLR and Left & Right	Horn Directivity: 90°x60°
RCA	Dimensions: (W)13.58in x (D)22.83in x
Ch 3 Bluetooth®	(H)19.29in
Master Section Bass & Treble EQ /	Weight: 15.43 lb
Line Out Jack 1/4" connector	

PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
 GROSS WEIGHT: 25 KG / 55.12 LB / MASTER PIECES: 1 PCS



EVO 15P

PASSIVE LOUDSPEAKER

▶ 1400W

- Two-way passive full range Loudspeaker built-in in ABS plastic, designed for the most diverse users.
- EVO series, delivers the sensitivity and bandwidth necessary for an efficient and natural response.
- Bring excellent output power for a maximum sound pressure level.
- Easy to carry them, extremely light & ideal for diverse indoor and outdoor places like pubs, clubs, concerts, karaoke, churches, small auditoriums and many other applications.
- Developed with quality materials this two-way system provides maximum power for any sound reinforcement situation.



SPECIFICATIONS

System: Passive Full Range Speaker	Driver: 1" Titanium (1.75" VC)
Ways: 2	Nominal dispersion: 90° x 60°
RMS power: 350W	Nominal impedance: 8 ohm
Program power: 700W	Frequency response: 40Hz - 18KHz
Peak power: 1400W	Sensitivity: 96dB (@1W/1m)
Material: ABS injection	SPL max: 125dB
Material: ABS injection	Dimensions (WxDxH): 53x47.5x76.5 cm
Woofers: 15" (2.5" KVC)	(20.9"x18.7"x30.1")



▶ ALSO IN WHITE

Cod. 600097 / Cod W. 600098

▶ 3 CHANNEL MIXER

▶ 15" WOOFER

▶ 1" DRIVER

PACKING INFO

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN
GROSS WEIGHT: 20 KG / 44.09 LB / MASTER PIECES: 1 PCS

2 WAY PASSIVE FULL RANGE LOUDSPEAKER



Cod. 600097 / Cod W. 600098



▲ Light-weight and easy to transport.



SPECIFICATIONS

EVO 12P

System: Passive Full Range Speaker

Ways: 2

RMS power: 250W

Program power: 500W

Peak power: 1000W

Material: ABS injection

Woofer: 12" (2" KVC)

Driver: 1" Titanium (1.44" VC)

Nominal dispersion: 90° x 60°

Nominal impedance: 8 ohm

Frequency response: 45Hz - 18KHz

Sensitivity: 94dB (@1W/1m)

SPL max: 122dB

Dimensions (WxDxH): 46x37.5x66 cm (18.1"x14.8"x26")

EVO 10P

System: Passive Full Range Speaker

Ways: 2

RMS power: 150W

Program power: 300W

Peak power: 600W

Material: ABS injection

Woofer: 10" (1.5" KVC)

Driver: 1" Titanium (1.44" VC)

Nominal dispersion: 90° x 60°

Nominal impedance: 8 ohm

Frequency response: 55Hz - 18KHz

Sensitivity: 92dB (@1W/1m)

SPL max: 120dB

Dimensions (WxDxH): 41x32.5x55.5 cm (16.1"x12.8"x21.9")

EVO 8P

System: Passive Full Range Speaker

Ways: 2

RMS power: 100W

Program power: 200W

Peak power: 400W

Material: ABS injection

Woofer: 8" (1.5" KVC)

Driver: 1" Titanium (1" VC)

Nominal dispersion: 90° x 60°


Nominal impedance: 8 ohm

Frequency response: 65Hz - 18KHz

Sensitivity: 92dB (@1W/1m)

SPL max: 125dB

Dimensions (WxDxH): 34.5x28x49 cm (13.6"x11"x19.3")

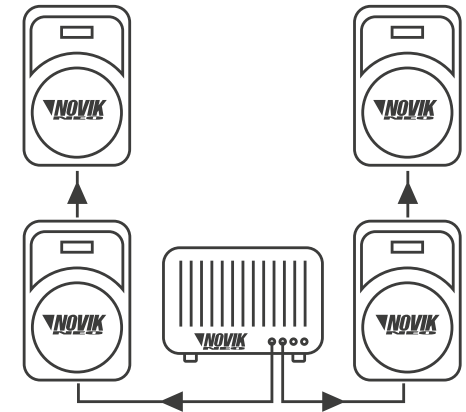

POWER MIXER

▲ Maximum number of speakers in parallel is 2 per powered mixer or amplified channel.

PACKING INFO

EVO 12P

MASTER DIMENSIONS: 460X375X655 MM / 18.1X14.8X25.8 IN
GROSS WEIGHT: 13.5 KG / 29.76 LB MASTER PIECES: 1 PCS

EVO 10P

MASTER DIMENSIONS: 410X325X555 MM / 16.1X12.8X21.9 IN
GROSS WEIGHT: 10 KG / 22.05 LB MASTER PIECES: 1 PCS

EVO 8P

MASTER DIMENSIONS: 340X280X480 MM / 13.4X11X18.9 IN
GROSS WEIGHT: 7.5 KG / 16.53 LB MASTER PIECES: 1 PCS

STREETSOUND V

PORTABLE ACTIVE P.A. SYSTEM

- STREETSOUND V takes your sound wherever you want.
- Design completely portable for transport to any space, live performances, street bands, entertainment, worship, clubs and more.
- This system offers all mix and playback options in one, 4 channels, EQ, Bluetooth® combined with 2 way speakers 8" for maximum power and graphic equalizer for frequency adjustment according to the place you work.
- Class-D amplifier with 640W+640W Max. Power.

SPECIFICATIONS

Configuration: Portable PA System

RMS Power: 160W + 160W

Program power: 320W + 320W

Peak Power: 640W + 640W

Woofer Impedance 4 ohm

Woofer Diameter: 8"

Driver: 1" Titanium

Frequency response: 60Hz - 18KHz

Sensitivity: 94dB (@ 1W/1m)

Max SPL: 122dB

Power supply: AC 115V/230V - 60/50Hz.

FEATURES

- Ultra-portable PA system
- Two way 8" Woofer
- Class D Amplifier
- 4 Mic-Line channel mixer
- MP3 player (remote control)
- Bluetooth®
- 2 x 5 band graphic equalizer
- Effects processor
- Ergonomic handles for easy transportation



Cod. 6000498

► OPEN VIEW

D CLASS D
AMPLIFIER

EASY
TRANSPORT

► **SNK-S2**
SPEAKER STAND



Cod. 6000038

Bluetooth®

PACKING INFO

STREET SOUND V

MASTER DIMENSIONS: 530X475X765 MM / 20.9X18.7X30.1 IN

GROSS WEIGHT: 6.12 KG / 35 LB MASTER PIECES: 1 PCS

SNK-S2


MASTER DIMENSIONS: 365X315X103 MM / 14.4X12.4X40.5 IN

GROSS WEIGHT: 17.7 KG / 39 LB MASTER PIECES: 4 PCS

EVOD BRAVERY 215

2 X 15" TWO WAY

▶ 1800W

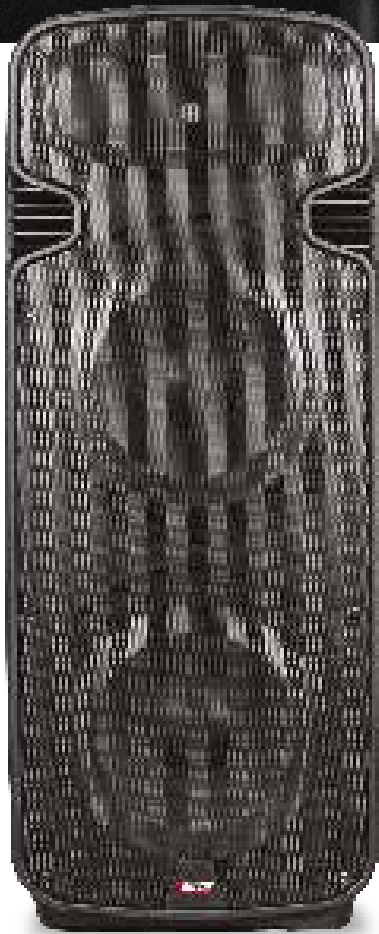

Cod. 6000500

- The EVOD BRAVERY 215 powered loudspeaker is the best sounding, highest performance line of enclosures for clubs, touring bands, church, stage and professional sound companies.
- It is a 2 way, full range, incorporating 2 x 15" extra power woofer and one titanium diaphragm, Kapton coil, compression driver. You can have many features in only one speaker: mic/line input, Bluetooth®, EQ.
- EVOD BRAVERY 215 has specially designed handles for easy movement and transportation so take your sound wherever you want.
- 1800W Max Power!



SPECIFICATIONS

RMS Power: 450 W	Sensitivity: 97 dB
Program Power: 900 W	Impedance: 8 Ohm
Peak Power: 1800 W	Switch power supply
Woofer: 2x15", 50 oz, 2.5" VC	Power supply: AC 110V/220V - 60/50Hz.
Compression driver: 34mm, 1.35" VC	Dimensions: 19.5x16x45.3"
Frequency Response: 55Hz-20KHz	(495x405x1150mm)

FEATURES

- Bluetooth®
- 1800W peak power
- MIC/Line Inputs
- EQ (Treble/Bass)
- Wheels and handles for easy transportation

▶ 3 CHANNEL MIXER

▶ 2X15" WOOFER

▶ 1.35" DRIVER

PACKING INFO

MASTER DIMENSIONS: 495X405X1115 MM / 19.5X15.9X43.89 IN
GROSS WEIGHT: 27 KG / 59.52 LB / MASTER PIECES: 1 PCS



EVO 410 HANDY

2 WAY 10" SPEAKER BOX

- The EVO 410 HANDY is a modern portable sound system with 6 mix channels.
- Class D amp with 1200W peak power. It's a system designed to be used both in interior and exterior places.
- It also works remotely thanks to its removable module console.
- With EVO 410 HANDY you'll be ready to assemble your sound system anywhere, fast and simple.

D CLASS D
AMPLIFIER

▶ 6 CHANNEL MIXER

▶ 10" TWO SPEAKERS



▲ BLUETOOTH®
DIGITAL PLAYER



▲ MIC + CABLE AND SPEAKER
CABLES INCLUDED



▲ MIC + CABLE AND SPEAKER
CABLES INCLUDED



SPECIFICATIONS

Configuration: Portable PA System	Maximum Sound Pressure Level: 124dB
RMS Power: 150W + 150W	Woofer Impedance: 4 Ohm
Program Power: 300W + 300W	Woofer Diameter: 25.4cm (10")
Peak Power: 600W+600W	Coil: Kapton VC 2"
Frequency Response: 55Hz - 20KHz	High Frequency Driver: Titanium Diaphragm 25mm (1")
Sensitivity: 95dB (@1W/1m)	Polar Pattern: Cardioid

FEATURES

- Class D Amplifier	- 2 speaker 10" + 1"
- 6 channel mixing, 4 mono channels and 1 L+R - stereo channel	- RMS Power 300W
- MP3 Player with LCD screen and digital player	- Remote Control
- 2-band EQ per channel	- Phantom Power in 4 XLR channels
	- Effect Processor with two modifiable parameters
	- Switching Power Supply



PACKING INFO

MASTER DIMENSIONS: 640X370X550 MM / 25.2X14.6X21.7 IN
GROSS WEIGHT: 21KG / 46.30 LB MASTER PIECES: 1 PCS

ROLLING SOUND PORTABLE ACTIVE SYSTEM

▶ 400W



Cod. 5110133

- 2-way Wireless System/MP3/Bluetooth®.
- Designed to take your sound anywhere unconnected with rechargeable battery, comfortable extendable handle and wheels for effortless transport.

▶ ROLLING SOUND 15BT

▶ 3 CHANNEL MIXER

▶ 2X15" WOOFER

▶ 1.35" DRIVER



SPECIFICATIONS

2-way portable powered system	Connecting external 12V
Operates on rechargeable battery	VHF Wireless Microphones
MP3/WMA/WAV Player	External Microphone Input (Echo Control)
Bluetooth®	Line Input
Extra Bass Woofer	Remote Control
High Clarity Compression Driver	Compact system for easy and comfortable transportation with slide handle and wheels
LCD Display	

PACKING INFO

MASTER DIMENSIONS: 745X480X440 MM / 29.3X18.9X17.3 IN
GROSS WEIGHT: 20.5 KG / 45.19 LB MASTER PIECES: 1 PCS




◀ INCLUDES HANDLE FOR COMFORT ON THE TRIP



THERE IS NO LIMIT



THERE IS NOT LIMIT BATTERY POWERED

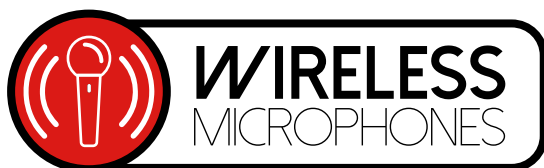

WIRELESS
MICROPHONES

THERE IS NO LIMIT



**BATTERY
POWERED!**

SPECIFICATIONS	15 BT <small>Cod. 5110133</small>	12 BT <small>Cod. 5110132</small>	10 BT <small>Cod. 5110131</small>
RMS Power	100W	70W	50W
Program Power	200W	140W	100W
Peak Power	400W	280W	200W
Frequency response	75Hz - 18KHz	80Hz - 18KHz	85Hz - 18KHz
Sensibility	96dB	95dB	92dB
Woofer	15"	12"	10"
Driver	1" V.C.	1" V.C.	1" V.C.
Wireless Microphones	VHF x2	VHF x2	VHF x1
Wireless Microphone Battery	9V Battery	9V Battery	9V Battery
Polar Pattern	Cardioid	Cardioid	Cardioid
Maximum USB/SD capacity	32GB	32GB	32GB
Dimensions (HxWxD)	74.5x48x44cm (29x18.9x17")	63.5x41.5x37.5 (25x16x14.7")	56.5x38.5x32.5 (22.2x15.2x12.8")
Power supply	AC 110V/220V - 60/50Hz.	AC 110V/220V - 60/50Hz	AC 110V/220V - 60/50Hz
Additional Battery (Optional)	12V/7Ah	12V/7Ah	12V/2.2Ah
Power Consumption	180W	140W	100W



 **Bluetooth®**



PACKING INFO

12BT

MASTER DIMENSIONS: 635x415x375 MM / 25x16.3x14.87 IN
GROSS WEIGHT: 15.5 KG / 34.17 LB MASTER PIECES: 1 PCS

10BT

MASTER DIMENSIONS: 565x385x325 MM / 22.2x15.2x12.8 IN
GROSS WEIGHT: 6.8 KG / 14.99 LB MASTER PIECES: 1 PCS

UNK 600

DUAL 99 CHANNELS

▶ MIC SYSTEM



Cod. 6000209

- UHF Wireless Microphone System masters the high pressure and extreme conditions of touring or installations environments while delivering uncompromising sound.
- Multilevel quiet control circuit, to avoid interference signal from outside open the mute system.
- Special voice compress-limiter design, it will not crack though the singer sang very loudly.
- Excellent cardioid dynamic polar pattern reduces feedback, bright and clear timbre.
- The UNK line, used the range from 500-900MHz band frequencies to prevent possible interference.
- High gain antenna, the space availability is more than 50 meters at the clearing.
- It is suitable for small and large stages, ballrooms, auditoriums, classrooms and churches.

SPECIFICATIONS (AVAILABLE FREQUENCY BAND: UHF 700-900 MHZ)

Receiver	Handling microphone	Comprehensive performance
Power supply: DC 17V	Transmitter power: 8.5 mW	Frequency stabilization: <+-30ppm
Consumption power: 4W	Modulation type: fm,f3f	Dynamic range: >90dB
Signal/noise ratio: >90dB	Max deviation: +-25KHz	Total harmonic distortion: <0.5%
Image & spurious rejection: >80dB	Spurious emission: >40dB (with carrier)	Frequency response: 40Hz-15KHz (+-3dB)
Border upon channel rejection: >80dB	Battery voltage: 1.5V x2	Audio output level: +-400mV
Receiving sensitivity: 10dBuV (Sinad=30dB)	Continuous use: 6 hours	
De-emphasis: 50us		



▲ EXCLUSIVE & CUSTOMIZED EASY-TO-CARRY PLASTIC CASE.

PACKING INFO

MASTER DIMENSIONS: 490X400X370 MM / 19.3X15.7X14.6 IN
GROSS WEIGHT: 14KG / 30.86 LB MASTER PIECES: 5 PCS

FEATURES

- A specially designed circuit switch is on the phone.
- It is for clearing up waves.
- Robust design construction reduces handling noise.
- Using multilevel high frequency and a mid frequency narrowband filter, so as to dispel any possible interference signals.
- LCD Display.

UNK 500

16 X 2 CHANNELS

► MIC SYSTEM

- Dual channel design. Up to 2 microphones can be used at the same time.
- Microprocessor control for an ultra-easy operation.
- PLL system. 16 channels presets without interference.
- Latest SAW lter to reduce RF out-band interference.
- Capsule designed to reduce feedback.



Cod. 6000202



SPECIFICATIONS (AVAILABLE FREQUENCY BAND: UHF 700-900 MHZ)

Receiver	Handling microphone	Comprehensive performance
Power supply: DC 17V	Transmitter power: 8.5 mW	Frequency stabilization: <+-30ppm
Consumption power: 4W	Modulation type: fm,f3f	Dynamic range: >90dB
Signal/noise ratio: >90dB	Max deviation: +-25KHz	Total harmonic distortion: <0.5%
Image & spurious rejection: >80dB	Spurious emission: >40dB (with carrier)	Frequency response: 40Hz-15KHz (+-3dB)
Border upon channel rejection: >80dB	Battery voltage: 1.5V x2	Audio output level: +-400mV
Receiving sensitivity: 10dBuV (Sinad=30dB)	Continuous use: 20 hours	
De-emphasis: 50us		



PACKING INFO

MASTER DIMENSIONS: 358X365X625 MM / 14.1X14.4X24.6 IN
GROSS WEIGHT: 16KG / 35.27 LB MASTER PIECES: 8 PCS

UNK 450 TWIN CHANNEL

► MIC SYSTEM



Cod. 6000223

SPECIFICATIONS (AVAILABLE FREQUENCY BAND: UHF 480-600 MHZ)

Receiver

Power supply: DC 17V

Consumption power: 5W

Signal/noise ratio: >90dB

Image & spurious rejection: >80dB

Border upon channel rejection: >80dB

Receiving sensitivity: 5dBuV Sinad=30dB

De-emphasis: 50us

Handling microphone

Frequency range 470-558MHz

Transmitter power: 30 mW

Modulation type: fm,f3f

Max deviation: +-25KHz

Spurious emission: >40dB with carrier

Battery voltage: 1.5V x2

Continuous use: 10 hours

Comprehensive performance

Frequency stabilization: <+-30ppm

Dynamic range: >90dB

Total harmonic distortion: <0.5%

Frequency response: 40Hz-15KHz +-3dB

Audio output level: +-800mV



- Choose excellent chipset and high quality component, so that timbre is very good.
- All use quartz crystal oscillating circuits, so the frequency is very steady.
- Volt indicating circuit in the microphone. It can tell you if it is necessary to change the battery.



PACKING INFO

MASTER DIMENSIONS: 595X408X380 MM / 23.4X16.1X15 IN
GROSS WEIGHT: 21KG / 46.30 LB MASTER PIECES: 10 PCS

UNK 300

UHF WIRELESS

► MIC SYSTEM

- UNK 300 is a UHF which uses a frequency range 620-865MHz to avoid interference and maintain interruption-free transmission.
- Reduced receiver to be maneuvered easily and take up little space on the sound system, ensures signal reception for more than 40m (150 ft) away.
- The handheld is a dynamic microphone, it has a cardioid polar pattern that reduces to the minimum the feedback possibility and off-axis sounds, rugged construction and on/off switch.
- This receptor is compatible with Headset UNK 320 and Lavalier UNK 350.



► **HEADSET**
UNK 320



► **LAVALIERE**
UNK 350

SPECIFICATIONS

Receiver

Power supply: DC 12V

Consumption power: 4W

Signal/noise ratio: >85dB

Image & spurious rejection: >100dB

Border upon channel rejection: >80dB

Receiving sensitivity: -98dB (Sinad=12dB)

Handling microphone

Transmitter power: 10 mW

Modulation type: fm,f3f

Max deviation: +-38KHz

Spurious emission: >40dB (with carrier)

Battery voltage: 1.5V x2

Working distance: >150 feet ideal

Continuous use: 8 hours

Comprehensive performance

Carrier frequency: UHF 620-865MHz

Frequency stabilization: 100ppm

Dynamic range: >80dB


Total harmonic distortion: <0.8%

Frequency response: 80Hz-14KHz (+-3dB)


Audio output level: +-400mV

40M **DISTANCE**
IN OPEN

▼ HEADSET



▼ LAVALIERE



— 500 Hz
- - - 1000 Hz
- - - 4000 Hz

PACKING INFO

UNK 300

MASTER DIMENSIONS: 595X408X380 MM / 23.4X16.1X15 IN
GROSS WEIGHT: 21 KG / 46.30 LB MASTER PIECES: 10 PCS

UNK 320

MASTER DIMENSIONS: 595X408X380 MM / 23.4X16.1X15 IN
GROSS WEIGHT: 21 KG / 46.30 LB MASTER PIECES: 10 PCS

UNK 350

MASTER DIMENSIONS: 595X408X380 MM / 23.4X16.1X15 IN
GROSS WEIGHT: 21 KG / 46.30 LB MASTER PIECES: 20 PCS

VNK 150 TRUE DIVERSITY

► MIC SYSTEM



Cod. 6000222



► HEADSET LAVALIERE VNK 200

Cod. 6000201

- Using multilevel high frequency and mid frequency narrowband filter, so as to dispel any possible interference signals.
- Diversity receiver, these transmission system ensure interference-free transmission and minimize dropouts in the RF link, avoid the dead angle.
- Special designed circuit on the microphone for clearing up waves of miscellaneous signals.
- With audio compressing-expanding technology, the machine can lower noise or increase the dynamic range. It can also lower re-echo.
- Using VHF 200-270 MHz band to avert interference frequency.
- There is a volt indication circuit in the microphone which can tell you if it is necessary to change the battery.
- Longest distance in open: 50m (164ft)

SPECIFICATIONS (AVAILABLE FREQUENCY BAND: VHF 200~270MHZ)

Receiver	Handling microphone	Comprehensive performance
Power supply: DC 17V	Transmitter power: 8.5 mW	Carrier frequency: VHF 200~270MHz
Consumption power: 4W	Modulation type: fm,f3f	Frequency stabilization: <+-30ppm
Signal/noise ratio: >90dB	Max deviation: +-25KHz	Dynamic range: >90dB
Image & spurious rejection: >80dB	Spurious emission: >40dB with carrier	Total harmonic distortion: <0.5%
Border upon channel rejection: >80dB	Battery voltage: 1.5V x3	Frequency response: 40Hz-15KHz +-3dB
Receiving sensitivity: 10dBuV Sinad=30dB	Continuous use: 6 hours	Audio output level: +-400mV
De-emphasis: 50us	Noise control	

50M DISTANCE
IN OPEN



PACKING INFO

VNK 200

MASTER DIMENSIONS: 630X372X400 MM / 24.8X14.6X15.7 IN
GROSS WEIGHT: 11 KG / 14.6 LB MASTER PIECES: 11 PCS

VNK 150

MASTER DIMENSIONS: 630X372X400 MM / 24.8X14.6X15.7 IN
GROSS WEIGHT: 12 KG / 26.46 LB MASTER PIECES: 10 PCS

FNK 10

CARDIOID CONDENSER

► MICROPHONE

- The FNK 10 gooseneck – mounted is a professional condenser microphone designed primarily for speech and vocal pickup.
- They can be mounted on lecterns, pulpits, conference tables and much more.
- Single gooseneck section near microphone base for easy orientation of the microphone.
- XLR connector with phantom power or two double A batteries can bring power for the red LED ring and the microphone signal.
- Streamlined design for seamless integration, the gooseneck's slender design is far less obstructive than a traditional microphone setup.
- Includes foam windscreen to prevent unwanted noise.



XLR Cable



Status LED



Ultra flexible neck



XLR Socket

SPECIFICATIONS

Type: Condenser	Directivity: Directional (Cardioid)
Frequency response: 60Hz – 18KHz	Max SPL: 128dB (1 KHz)
Output impedance: 600 Ohm	S/N rate: 63dB
Sensitivity: -56dB +/- 3dB	Dynamic range: 99dB
Battery: 3V DC	

FEATURES

- Cardioid polar pattern for easy adaption to any situation
- Condenser microphone
- Easy to assembly with battery support
- On/Off switch
- Status LED
- Cable included
- Strong and stable support



Cod. 6000203

PACKING INFO

MASTER DIMENSIONS: 450X410X415 MM / 17.7X16.1X16.3 IN
GROSS WEIGHT: 10.6KG / 20.27 LB MASTER PIECES: 10 PCS

MICROPHONE PROFESSIONAL CARDIOID

► DYNAMIC



► FNK 840

- FNK 840 is a dynamic microphone specially designed to lead vocals.
- Rugged construction and super cardioid polar pattern make it the best choice for any live performance situation.
- This super cardioid microphone rejects all feedback and ambient noise.
- Metal body resistant to any use, designed to reduce noise provoked by sudden movements.
- The package includes clip and cable.

Cod. 6000212

SPECIFICATIONS

Type: Dynamic

Directivity: Unidirectional

Polar Pattern: Cardioid

Frequency response: 50Hz - 15KHz


Output impedance: 600

Sensitivity: -72dB

Body: Metal

Cable: 16.4ft / 5m

Connector: XLR / Cable: XLR



PACKING INFO

MASTER DIMENSIONS: 475X348X360 MM / 18.7X13.7X14.2 IN

GROSS WEIGHT: 18KG / 39.68 LB MASTER PIECES: 20 PCS



► FNK 580

- The FNK 580 is an unidirectional dynamic microphone with a frequency response designed to obtain a clear and loud sound, it is ideal for the sound of the live vocals and instruments.
- Cardioid polar pattern isolates the main sound source and reduces background noise.
- With a metal body is resistant to any use, and designed construction to reduce noise induced by sudden movements.

Cod. 6000211

SPECIFICATIONS

Type: Dynamic

Directivity: Unidirectional

Polar Pattern: Cardioid

Frequency response: 50Hz - 15KHz


Output impedance: 600

Sensitivity: -72dB

Body: Metal

Cable: 16.4ft / 5m

Connector: XLR / Cable: XLR-Plug 1/4"

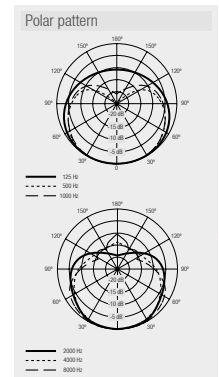

PACKING INFO

MASTER DIMENSIONS: 475X348X360 MM / 18.7X13.7X14.2 IN

GROSS WEIGHT: 16.5KG / 36.38 LB MASTER PIECES: 20 PCS

PROFESSIONAL DYNAMIC MICROPHONE



Cod. 6000205

▶ FNK 40XLR

- FNK 40XLR is a dynamic microphone designed to multi-use applications.
- Cardioid polar pattern with body designed to reject off-axis sound.
- On/off convenient switch.
- Metal body is resistant to any use.
- The package includes clip and cable.



▶ MADE IN GERMANY CAPSULE



Cod. 6000204

▶ FNK 30

- FNK 30 is a dynamic microphone designed for any situation in which sound reinforcement is required.
- Cardioid polar pattern to capture with higher directivity.
- On/off convenient switch.
- Metal body resistant to any use, both indoor and outdoor.
- The package includes clip and cable.



▶ MADE IN GERMANY CAPSULE



Cod.6000207

▶ FNK 5

- FNK 5 is a dynamic microphone designed to multi-use applications.
- Dynamic microphone, with cardioid polar pattern.
- On/off convenient switch.
- Metal body, resistant to any use and easy manipulation.
- The package includes clip and cable.



▶ MADE IN GERMANY CAPSULE

SPECIFICATIONS

Type: Dynamic

Directivity: Unidirectional

Polar Pattern: Cardioid

Frequency response: 60Hz - 15KHz


Output impedance: 600

Sensitivity: -72dB

Body: Metal

Cable: 15ft / 4.5m

Connector: XLR / Cable: XLR



PACKING INFO

MASTER DIMENSIONS: 475X348X360 MM

18.7X13.7X14.2 IN

GROSS WEIGHT: 26 KG / 57.32 LB

MASTER PIECES: 20 PCS

SPECIFICATIONS

Type: Dynamic

Directivity: Unidirectional

Polar Pattern: Cardioid

Frequency response: 60Hz - 14KHz


Output impedance: 600

Sensitivity: -72dB

Body: Metal

Cable: 15ft / 4.5m

Connector: XLR / Cable: XLR-Plug 1/4"



PACKING INFO

MASTER DIMENSIONS: 475X348X360 MM

18X13.7X14.2 IN

GROSS WEIGHT: 20.27 KG / 45.64 LB

MASTER PIECES: 20 PCS

SPECIFICATIONS

Type: Dynamic

Directivity: Unidirectional

Polar Pattern: Cardioid

Frequency response: 50Hz - 15KHz


Output impedance: 600

Sensitivity: -72dB

Body: Metal

Cable: 15ft / 4.5m

Connector: XLR / Cable: XLR-Plug 1/4"



PACKING INFO

MASTER DIMENSIONS: 445X405X350 MM

17.5X15.9X13.8 IN

GROSS WEIGHT: 23.8 KG / 52.47 LB

MASTER PIECES: 40 PCS

CONCERT MKII

STUDIO MONITOR



- **LOW FREQUENCY PORT**

Specifically designed to obtain deep and dented bass, each port is calibrated by our engineers, to be the perfect woofer complement, achieving an extensive frequency response and reduced turbulence. Design, engineering and technology for the modern sound engineer.

SPECIFICATIONS

	CONCERT 6 MKII <small>Cod.6000004</small>	CONCERT 5 MKII <small>Cod.6000003</small>
RMS Power:	100W	90W
HF Power:	30W	30W
LF Power:	70W	60W
Frequency response (-3dB):	45Hz - 22Khz	56Hz - 22Khz
LF Woofer:	6" KSV	5" KSV
Woofer Material:	Kevlar	Kevlar
Voice coil:	1"	1" KSV 3.6
HF Tweeter:	Silk Dome	Silk Dome
Input:	XLR + TRS	XLR + TRS
Dimensions (H x W x D):	316 x 226 x 254 (mm)	271 x 183 x 224 (mm)
	12.4 x 8.9 x 10 (inches)	10.7 x 7.2 x 8.2 (inches)
Material:	MDF	MDF
Supply Voltage:	110/220V~60/50Hz	110/220V~60/50Hz
Power Consumption	200W	180W

- **POWERED SERIES / BI-AMPLIFIED FULL-RANGE**

- The CONCERT MKII Active Studio Monitors are great for mixing music in your DAW Software, editing video, or any other task requires precise, accurate, detailed sound.

FEATURES

- Ideal for Mixing, Mastering and Recording
- Double precision amplifier
- Kevlar woofer for dented lows
- Silk Tweeter and waveguide for clear highs
- Port tuning. This port has been carefully designed to produce a precise reproduction of bass frequencies
- Balanced inputs
- Input Level Control



PACKING INFO

CONCERT 6

MASTER DIMENSIONS: 432X313X342 MM / 17X12.3X13.5 IN
GROSS WEIGHT: 14.4 KG / 31.75 LB MASTER PIECES: 1 PCS

CONCERT 5

MASTER DIMENSIONS: 385X264X302 MM / 15.2X10.4X11.9 IN
GROSS WEIGHT: 11.2 KG / 24.69 LB MASTER PIECES: 1 PCS

HNK-402

REFERENCE STUDIO

▶ HEADPHONES

- The HNK-402 are perfect for all type of monitoring, DJ and general high delity music listening. Large 50mm diaphragms and open air design provides a especic frequency response and improved bass. Features include a wide self-adjusting headband, 3m extended cord, over ear desing, 1/8" jack stereo connector with 1/4" adapter included.

1/4" JACK INCLUDED

1/8" STEREO INCLUDED



FEATURES

- Diaphragm: 50mm full range
- Max Power: 1200mW
- Impedance: 32
- Frequency Response: 15Hz - 25KHz
- Sensitivity: 95dB
- Cable length: 3m 9.8'
- Connector: 3.5mm +6.3mm

FNK-02U

USB STUDIO CONDENSER

▶ MICROPHONE

- The FNK-02U is a professional USB STUDIO CONDENSER MICROPHONE, designed to be used in different situations that demand a at frequency response, low distortion and clarity sound. This products includes a USB cable and swivel stand mount.

USB CABLE INCLUDED



FEATURES

- Element: Condenser
- Polar Pattern: Cardioid
- Frequency Response: 30Hz-18KHz
- Sensitivity: -34dB
- Output Impedance: 100
- Load Impedance: 1000
- Self Noise: 16dB A
- SPL Max: 132dB
- S/N Ratio: 78dB

MEGAPHONES

SPEAKING TIME

► PROFESSIONAL



Cod. 6000601

► NK-226S

SPECIFICATIONS

Diameter: 237 mm (9.3")

Mouth: 150 mm (5.9")

Power: 5W

Power Supply: UM-3 (AA) x 6u (not supplied)

PACKING INFO

MASTER DIMENSIONS: 531X374X568 MM / 20.9X14.7X22.4 IN

GROSS WEIGHT: 11.94KG / 26.32 LB MASTER PIECES: 12 PCS

Battery use: 15 hours (intermittent use)

Weight: 620 grs (1.37 lb)

Range: 350m (1148.3ft) open eld / 300m

(984.25ft) in-city

FEATURES

- 5W Power
- 350m (1148.3ft) Open Field
- 300m (984.25ft) In City
- Built-in Sirent

🕒 15HS SPEAKING TIME



Cod. 6000603

► NK-66S

SPECIFICATIONS

Diameter: 340 mm (13.4")

Mouth: 230 mm (9")

Power: 25W MAX

Power Supply: UM-2 (C) x 8u (not supplied)

PACKING INFO

MASTER DIMENSIONS: 386X506X751 MM / 15.2X19.9X29.6 IN

GROSS WEIGHT: 14.1KG / 31.09 LB MASTER PIECES: 6 PCS

Battery use: 15 hours (intermittent use)

Weight: 1650 grs (3.64 lb)

Range: 1000m (3280.8ft) open eld / 500m

(1640.4ft) in-city

FEATURES

- 25W Power
- 1000m (3280.8ft) Open Field
- Shoulder Strap
- Built-in Sirent

🕒 15HS SPEAKING TIME

MEGAPHONES

SAY IT OUT LOUD!

▶ NK-55S



Cod. 6000602

FEATURES

- 25W Power
- 1200m (3937ft) Open Field
- 600m (1968.5ft) In City
- Built-in Sirent

🕒 15HS SPEAKING TIME

▶ NK-55S



Cod. 6000605

● REC FUNCTION INCLUDED

FEATURES

- 25W Power
- 1200m (3937ft) Open Field
- 600m (1968.5ft) In City
- Built-in Sirent

🕒 15HS SPEAKING TIME

▶ NK-3S



Cod. 6000604

FEATURES

- 10W Power
- 450m (1476.4ft) Open Field
- 250m (820.21ft) in-city
- Built-in Siren

🕒 15HS SPEAKING TIME

SPECIFICATIONS

Diameter: 340 mm (13.4")

Mouth: 230 mm (9")

Power: 25W MAX

Power Supply: UM-2 (C) x 8u

(not supplied)

Battery use: 15 hours

(intermittent use)

Weight: 1650 grs (3.64 lb)

Range: 1200m (3937ft)

open field / 600m

(1968.5ft) in-city



PACKING INFO

MASTER DIMENSIONS: 416X506X751 MM

16.4X19.9X29.6 IN

GROSS WEIGHT: 13.78 KG / 30.38 LB

MASTER PIECES: 6 PCS

SPECIFICATIONS

Diameter: 310 mm (12.2")

Mouth: 185 mm (7.3")

Power: 10W

Power Supply: UM-3 (AA) x 6u

(9V DC)

Battery use: 15 hours

(intermittent use)

Weight: 900 grs (1.98 lb)

Range: 500m (1640.4ft)

open field / 300m

(984.25ft) in-city



PACKING INFO

MASTER DIMENSIONS: 350X471X691 MM

138X185X272 IN

GROSS WEIGHT: 9.06 KG / 16.97 LB

MASTER PIECES: 6 PCS

SPECIFICATIONS

Diameter: 340 mm (13.4")

Mouth: 230 mm (9")

Power: 25W MAX

Power Supply: UM-2 (C) x 8u

(not supplied)

Battery use: 15 hours

(intermittent use)

Weight: 1650 grs (3.64 lb)

Range: 1200m (3937ft)

open field / 600m

(1968.5ft) in-city



PACKING INFO

MASTER DIMENSIONS: 350X471X691 MM

138X185X272 IN

GROSS WEIGHT: 9.06 KG / 16.97 LB

MASTER PIECES: 6 PCS

WOOFERS

LOW SOUND

► PROFESSIONAL

► W/PW 18450



Cod. 6000130

SPECIFICATIONS

Cloth-Edge paper cone	Impedance: 8 Ohm
Magnet: 100oz	SPL: 99dB/W/M
Voice coil: 4"KSV	RMS power: 450W

PACKING INFO

MASTER DIMENSIONS: 515X515X240 MM / 20.3X20.3X6.4 IN
GROSS WEIGHT: 12.5KG / 27.56 LB MASTER PIECES: 1 PCS

WOW! 18" 900W
PREMIUM

- The NOVIK professional subwoofers offer a perfect combination of power handling & deep bass and mid-bass, making it ideal for cabinet installation.
- The neodymium magnet system, manufactured exclusively by NOVIK, creates a motor of power.
- By using a large Kapton voice coil to support a large area of the Cloth Edge shallow cone, the prole of the woofer remains low and core breakup distortion at high level is prevented.
- These subwoofers are rear vented making use of NOVIK advance controlled acoustic resistance lter that improves the acoustics by controlling the cone movement.

► W/PW 15400



Cod. 6000129

SPECIFICATIONS

Cloth-Edge paper cone	Impedance: 8 Ohm
Magnet: 100oz	SPL: 98dB/W/M
Voice coil: 4"KSV	RMS power: 400W

PACKING INFO

MASTER DIMENSIONS: 425X425X185 MM / 16.7X16.7X7.3 IN
GROSS WEIGHT: 11KG / 24.25 LB MASTER PIECES: 1 PCS

WOW! 15" 800W
PREMIUM

► W/PW 12350



Cod. 6000128

SPECIFICATIONS

Cloth-Edge paper cone	Impedance: 8 Ohm
Magnet: 100oz	SPL: 97dB/W/M
Voice coil: 4"KSV	RMS power: 350W

PACKING INFO

MASTER DIMENSIONS: 340X340X185 MM / 13.4X13.4X7.3 IN
GROSS WEIGHT: 11KG / 24.25 LB MASTER PIECES: 1 PCS

WOW! 12" 700W
PREMIUM

WOOFERS LOW SOUND



▶ WOW 18300



Cod. 6000127

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 70oz SPL: 96dB/W/M

Voice coil: 3"ASV RMS power: 300W

PACKING INFO

MASTER DIMENSIONS: 485X485X325 MM / 19.1X19.1X12.8 IN
GROSS WEIGHT: 8 KG / 17.64 LB MASTER PIECES: 1 PCS

▶ 18" ▶ 600W

▶ WOW 15250



Cod. 6000126

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 50oz SPL: 94dB/W/M

Voice coil: 3"ASV RMS power: 250W

PACKING INFO

MASTER DIMENSIONS: 405X405X325 MM / 15.9X15.9X12.8 IN
GROSS WEIGHT: 5.2 KG / 11.46 LB MASTER PIECES: 1 PCS

▶ 15" ▶ 500W

▶ WOW 12180



Cod. 6000127

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 40oz SPL: 92dB/W/M

Voice coil: 2"ASV RMS power: 180W

PACKING INFO

MASTER DIMENSIONS: 350X350X325 MM / 13.8X13.8X12.8 IN
GROSS WEIGHT: 7.3 KG / 16.09 LB MASTER PIECES: 1 PCS

▶ 12" ▶ 360W

▶ WOW 15150



Cod. 6000125

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 30oz SPL: 92dB/W/M

Voice coil: 2"ASV RMS power: 150W

PACKING INFO

MASTER DIMENSIONS: 405X405X325 MM / 15.9X15.9X12.8 IN
GROSS WEIGHT: 3.4 KG / 7.5 LB MASTER PIECES: 1 PCS

▶ 15" ▶ 300W

WOOFERS LOW SOUND

▶ WOW 12120



Cod. 6000126

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 30oz SPL: 92dB/W/M

Voice coil: 1.5"ASV RMS power: 120W

PACKING INFO

MASTER DIMENSIONS: 350X350X325 MM / 13.8X13.8X12.8 IN
GROSS WEIGHT: 5.9 KG / 13.01 LB MASTER PIECES: 2 PCS

▶ 12" ▶ 240W

▶ WOW 10120



Cod. 6000126

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 40oz SPL: 90dB/W/M

Voice coil: 2"ASV RMS power: 120W

PACKING INFO

MASTER DIMENSIONS: 575X295X285 MM / 22.6X11.6X11.2 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 4 PCS

▶ 10" ▶ 240W

▶ WOW 8100



Cod. 6000121

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 40oz SPL: 90dB/W/M

Voice coil: 2"ASV RMS power: 100W

PACKING INFO

MASTER DIMENSIONS: 460X240X265 MM / 18.1X9.4X10.4 IN
GROSS WEIGHT: 11.4 KG / 25.13 LB MASTER PIECES: 4 PCS

▶ 8" ▶ 200W

▶ WOW 6570



Cod. 6000120

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm

Magnet: 30oz SPL: 87dB/W/M

Voice coil: 1.5"ASV RMS power: 70W

PACKING INFO

MASTER DIMENSIONS: 580X205X225 MM / 22.8X8.1X8.9 IN
GROSS WEIGHT: 11.8 KG / 26.01 LB MASTER PIECES: 6 PCS

▶ 6.5" ▶ 140W

DRIVERS

HF COMPRESSION DRIVERS

- When choosing a compression driver for a cabinet or sound system, novik neo provides the best solution of high quality, ensuring an extended frequency response in high and mid-high.
- Drk line offers high sensibility and low distortion.

▶ DRK 125



Cod. 6000022

SPECIFICATIONS

Driver: 1"	Frequency response:
Voice coil: 1.44" (34mm)	1.5KHz - 18KHz
Magnet: 12.50oz	Sensitivity (SPL): 105dB
Peak power: 160W	Diaphragm material:
RMS power: 40W	Titanium
Impedance: 8 Ohm	

PACKING INFO

MASTER DIMENSIONS:	395X190X150 MM
	15.6X7.5X5.9 IN
GROSS WEIGHT:	9.7 KG / 21.38 LB
MASTER PIECES:	20 PCS

▶ 1" ▶ 50W

▶ RK 125

SPECIFICATIONS

Replacement diaphragm
Voice coil: 1.44" (34mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

PACKING INFO

MASTER DIMENSIONS:	405X395X150MM
	15.6X7.5X5.9 IN
GROSS WEIGHT:	5 KG / 11.02 LB
MASTER PIECES:	300 PCS

▶ DRK 1540



Cod. 6000023

SPECIFICATIONS

Driver: 1"	Frequency response:
Voice coil: 1.44" (34mm)	1.5KHz - 18KHz
Magnet: 12.50oz	Sensitivity (SPL): 105dB
Peak power: 160W	Diaphragm material:
RMS power: 40W	Titanium
Impedance: 8 Ohm	

PACKING INFO

MASTER DIMENSIONS:	305X210X190MM
	12X8.3X7.5 IN
GROSS WEIGHT:	10 KG / 22.05 LB
MASTER PIECES:	12 PCS

▶ 1" ▶ 80W

▶ RK 1540

SPECIFICATIONS

Replacement diaphragm
Voice coil: 1.44" (34mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

PACKING INFO

MASTER DIMENSIONS:	405X395X150MM
	15.6X7.5X5.9 IN
GROSS WEIGHT:	5 KG / 11.02 LB
MASTER PIECES:	300 PCS

HIGH SENSIBILITY AND LOW DISTORTION

- Built with Titanium diaphragm, it achieves a clear and crystal sound.
- All line products are recommended for PA systems, monitors, car audio and other applications.
- Maximum performance and SPL.

▶ DRK 2060



Cod. 6000024

SPECIFICATIONS

▶ PROGRAM 120W

Driver: 1"	Frequency response:
Voice coil: 1.75" (44mm)	800Hz - 18KHz
Magnet: 20oz	Sensitivity (SPL): 107dB
Peak power: 240W	Diaphragm material:
RMS power: 60W	Titanium
Impedance: 8 Ohm	

PACKING INFO

MASTER DIMENSIONS:	375X260X100 MM
	14.8X10.5X3.9 IN
GROSS WEIGHT:	9.3 KG / 20.50 LB
MASTER PIECES:	6 PCS

▶ 1" ▶ 120W

▶ RK 2060

SPECIFICATIONS

Replacement diaphragm
Voice coil: 1.75" (44mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

PACKING INFO

MASTER DIMENSIONS:	405X395X150 MM
	15.6X7.5X5.9 IN
GROSS WEIGHT:	6 KG / 13.23 LB
MASTER PIECES:	300 PCS

▶ DRK 3100



Cod. 6000025

SPECIFICATIONS

▶ PROGRAM 200W

Driver: 1"	Frequency response:
Voice coil: 3" (72mm)	800Hz - 18KHz
Magnet: 60oz	Sensitivity (SPL): 110dB
Peak power: 400W	Diaphragm material:
RMS power: 100W	Titanium
Impedance: 8 Ohm	

PACKING INFO

MASTER DIMENSIONS:	405X395X150 MM
	15.9X15.6X5.9 IN
GROSS WEIGHT:	21 KG / 46.03 LB
MASTER PIECES:	4 PCS

▶ 1" ▶ 200W

▶ RK 3100

SPECIFICATIONS

Replacement diaphragm
Voice coil: 3" (72mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

PACKING INFO

MASTER DIMENSIONS:	405X395X150 MM
	15.6X7.5X5.9 IN
GROSS WEIGHT:	6 KG / 13.23 LB
MASTER PIECES:	300 PCS

HORNS & CABINET HARDWARE

- Our cabinet hardware components are the quick and convenient way to assembly your desired speaker using always the highest product quality manufacturing standards.

▶ BJ 2

Cod. 6000036



SCREW SET INCLUDED

Black metal 2 legs cabinet corner

PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 100 PCS

▶ CDR 10

Cod. 6000026



1" THROAT HORN

Symmetrical Plastic Horn 1 - 3/8"
18 tpi 90° x 40°

PACKING INFO

MASTER DIMENSIONS: 900X605X530MM
35.4X23.8X20.9 IN
GROSS WEIGHT: 6 KG / 13.23 LB
MASTER PIECES: 12 PCS

▶ CDR 20

Cod. 6000028



1" THROAT HORN

Plastic Horn 1 - 3/8" 18 tpi

PACKING INFO

MASTER DIMENSIONS: 900X605X530MM
35.4X23.8X20.9 IN
GROSS WEIGHT: 6 KG / 13.23 LB
MASTER PIECES: 12 PCS

▶ CDR 25

Cod. 6000029



1" THROAT HORN

Plastic Horn 1 - 3/8" 18 tpi 100° x 60°

PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 8 PCS

▶ D2

Cod. 6000030



SPEAKER MOUNTING TOP HAT

Heavy Duty Steel - 35mm / 1.375"
Diameter - Black Powder Coated

PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 80 PCS

▶ K1

Cod. 6000033



SPEAKER PORT TUBE

Heavy Duty Steel - 90 x 75 x 72 mm
(3.5"x3"x2.8") - Black Powder Coated

PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 100 PCS

HIGH SENSIBILITY AND LOW DISTORTION

- Speaker horns are engineered to operate smoothly down to the lowest possible crossover frequency, while maintaining consistent and predictable dispersion throughout their intended range.

▶ **K2**

SPEAKER PORT TUBE

Cod. 6000034

Heavy Duty Steel - 63 x 43 x 50 mm
(2.5"x1.7"x2") Silver Powder Coated



PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 100 PCS

▶ **K5**

SPEAKER PORT TUBE

Cod. 6000035

Heavy Duty Steel - 88 x 70 x 100 mm
(3.4"x2.8"x3.9") Black Powder Coated



PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 20 PCS

▶ **T2**

PLASTIC CABINET BAR HANDLE

Cod. 6000031



PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 25 PCS

▶ **T5**

PLASTIC CABINET BAR HANDLE

Cod. 6000032



PACKING INFO

MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 20 PCS

▶ **JX3**

SPEAKON® JACK ¼" TERMINAL

Cod. 6000027

6 connectors dish



PACKING INFO


MASTER DIMENSIONS: 480X480X350MM
18.9X18.9X13.8 IN
GROSS WEIGHT: 5 KG / 11.02 LB
MASTER PIECES: 8 PCS

SYSTEM EXAMPLES

SUGGESTED NOVIK LINEUP

► CONFIGURATION

- The setups shown on this pages are just a suggested configuration for NOVIK products, you can combine them in the most convenient way, while respecting technical specifications and recommendations included in the user manual.
- For more information or advice, please contact your local dealer.

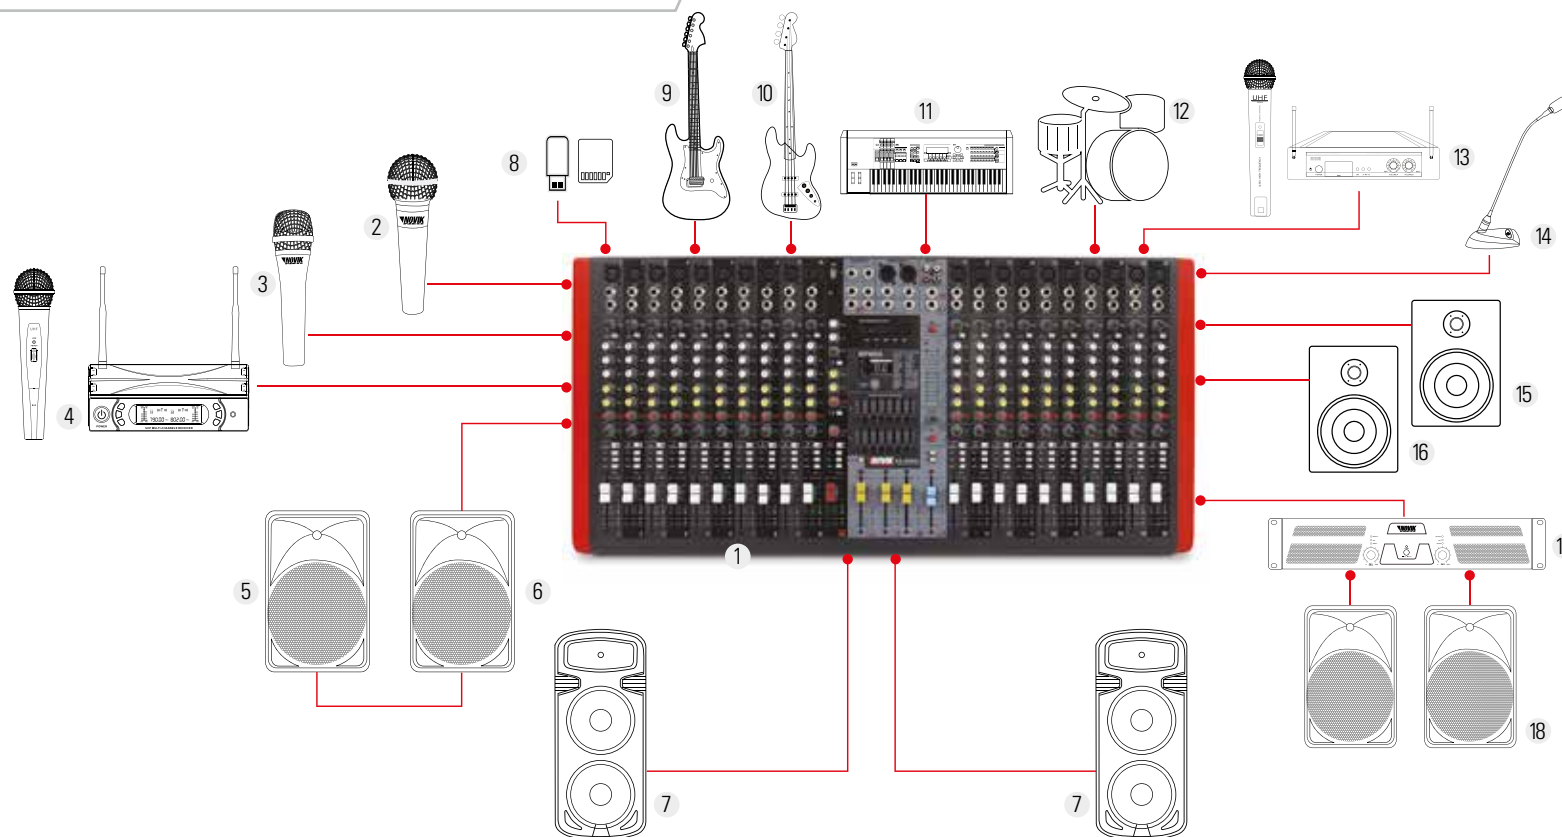

PRODUCTS & ACCESSORIES

- 1- Mixer nvk 20m usb
- 2- Fnk 840
- 3- Fnk 540
- 4- Unk 600
- 5- Evo 350a usb
- 6- Evo 250a usb
- 7- Evod bravery 215
- 8- Usb/sd card
- 9- Guitar
- 10- Bass
- 11- Synth
- 12- Drums
- 13- Unk 500
- 14- Fnk 10
- 15- Concert 5 mkii
- 16- Concert 6 mkii
- 17- Novo 900
- 18- Evo 12p

NOVIK NEO



PORTABLE AUDIO SYSTEM

INTRODUCTION

Today, NOVIK is a leader brand in professional and commercial audio in America. Since its beginnings in Brazil during the year 1974, NOVIK began a long way of quality and reliability. It was during the 90's that it turned into the major manufacturer of speakers in Latin America, continuously focusing in accompanying its products with the most advanced technology and performance. A few years ago, NOVIK has become essential to create solutions for all areas of professional audio, supported by the high quality standards, investigation and development that characterizes the brand.

At present, NOVIK has developed new equipment lines that extend its product range beyond the imaginable, characterized by its functionality and exclusive designs. The new line of ultra slim powered consoles, class D amplifiers, portable sound systems and an endless number of original products provide solutions with the highest technology to the user. Through the years, NOVIK installed in America the concept of quality and condence in professional and commercial audio products, today, once again, it prints with investigation, development, functionality and technology these new products on the pages of Professional Audio of America.

INDEX

- | | | |
|-----------------|--------------------|------------------|
| 66. CINEMA 3 | 76. START XL | 86. IMPACT ONE |
| 67. INFINITY 8 | 77. BEAT XL | 86. IMPACT TWO |
| 68. STAGE 8 PRO | 77. CHRONOS | 87. IMPACT THREE |
| 69. TITAN | 78. CONSTELLATION | 87. IMPACT FOUR |
| 70. SHOCK 6 II | 79. AURORA | 88. EXTREME-X |
| 71. SHOCK 26 | 80. START XL SMART | 88. INFINITY 8 |
| 72. X-BLAST | 81. AION | 89. TWISTER 4 |
| 73. LIGHT X | 82. LIGHTSHOW | 89. TWISTER 6 |
| 74. HNK-500BT | 83. GLOW | 90. IMPACT DJ |
| 75. SHOT 4 | 84. W-CHARGE | 90. REACTOR DJ |
| 75. XBOOM | 85. EARTHQUAKE DJ | 91. ULTIMATE |
| 76. FOCUS | 85. THUNDER | |

CINEMA 3 SOUNDBAR SYSTEM

► CINEMA SENSATION



DEEPER
BASS SOUND



360
SURROUND



PLUG
& PLAY



MOUNT
SOCKET



AUX
INPUT



Cod. 6000762

SUPERIOR VOICE CLARITY

EASY INSTALLATION

DRIVER 2X3" + 2

SPECIFICATIONS

2.1 Amplifier system

Bluetooth®

Auxiliary line input

Driver: 2x3" + 2"

Passive radiator

Frequency response: 80Hz - 20KHz


Signal to Noise ratio: >40dB

Distortion: <1%

RMS Power: 80W

Power Supply: 110-220V~60/50Hz

Mount socket

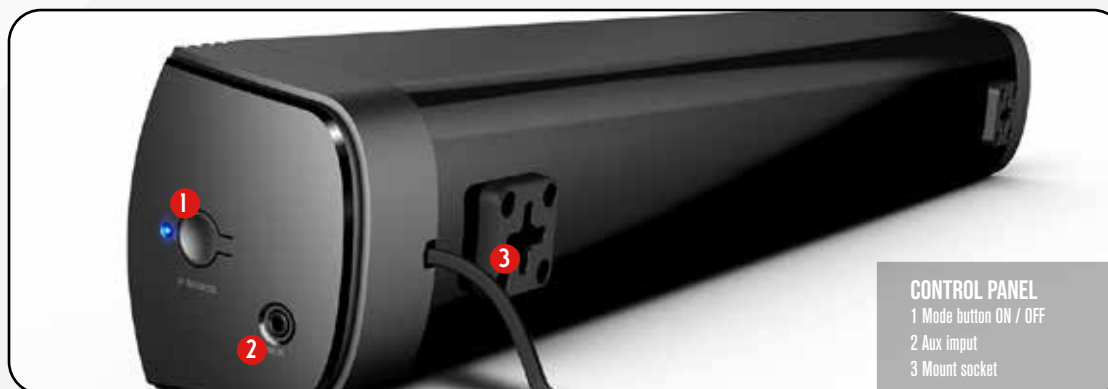

CONTROL PANEL

- 1 Mode button ON / OFF
- 2 Aux input
- 3 Mount socket

 **Bluetooth®**

- DEDICATED BASS RADIATOR
- WIRELESS CONNECTIVITY
- 609X95X78 MM

PACKING INFO

MASTER DIMENSIONS: 671X295X345 MM / 26.4X11.6X13.58 IN

GROSS WEIGHT: 8.2 KG / 18 LB MASTER PIECES: 4 PCS

INFINITY 8 SOUNDBAR SUBWOOFER

► CINEMA SOUND



DEEPER
BASS SOUND



CINEMA
SOUND



AUX
INPUT



REMOTE
CONTROL



360
SURROUND

Cod. 6000729

SPECIFICATIONS

2.1 Amplifier system	Subwoofer: 5.25"
Bluetooth®	Frequency response:
Mp3 player	Soundbar: 110Hz - 20KHz
Auxiliary line input	Subwoofer: 20Hz - 150Hz
Subwoofer output	Signal to Noise ratio: >40dB
Digital 2-band equalizer	Distortion: <1%
Remote control	Power Supply: AC 110-220V~60/50Hz 44W
Driver: 2.25" x 2	

DIMENSIONS

SOUNDBAR: W/817 X H65 X D68MM

SUBWOOFER: W/166 X H304 X D318MM

2-BAND EQUALIZER

5.25" WOOFER

DRIVER 2.5"X2

 **Bluetooth®**

COMPATIBLE WITH BLUETOOTH DEVICES



PACKING INFO

SOUNDBAR

MASTER DIMENSIONS: 900X410X280 MM / 35.4X16.1X11 IN
GROSS WEIGHT: 13.28 KG / 29.27 LB MASTER PIECES: 6 PCS

SUBWOOFER

MASTER DIMENSIONS: 737X634X383 MM / 29X24.9X15.07 IN
GROSS WEIGHT: 21.14 KG / 34.17 LB MASTER PIECES: 6 PCS

STAGE 8 PRO COMPACT ALL IN ONE

▶ 400W

- Take the NOVIK NEO STAGE-8 PRO with you to anywhere you want and anytime you need. The true portable sound system!

SPECIFICATIONS

Compact all-in-one system with 4CH mixer

Subwoofer: 8"

Full range speaker: 4 x 2.75"

Frequency Response: 55Hz-20KHz

Max SPL: 118dB

Nominal dispersion: 180° H x 40° V

Amplifier: Class D 250W LF + 150W HF

Inputs:

Mic in : XLR and 1/4" TRS combo

Line in : XLR

Aux in : RCA and 1/8" TRS

Instrument in: 1/4" TRS

Output:

Line out : XLR

Battery : 4.5A 12V

Bluetooth® stereo link

RGB lights effects

AC Power Supply : 100-240V ~ 60/50Hz

12V DC input for auxiliary power supply

(Not included)

KARAOKE

The integrated sound mixer lets you connect up to 2 microphones and make you hear everywhere.

DANCE / PARTY

The incredible strong and clear sound and the ultra wide coverage makes the perfect sound system for DJ parties make you hear.

MULTIPURPOSE

Use this compact sound system everywhere, like parties, on the street, at events, gyms, conferences and more! There are no limits!

LIVE PERFORMANCE

Instrument inputs and integrated rechargeable battery to take out the music inside you. Make yourself heard!



**4 CHANNEL
MIXER**



**RGB
LIGHTS EFFECT**



**BATTERY
RECHARGEABLE INCLUDED**



**ULTRA WIDE
COVERAGE**



**EXTENDED
LOW-FREQUENCY RESPONSE**



**LINKCONNECT™
TECHNOLOGY**



COMPATIBLE WITH BLUETOOTH DEVICES



Cod. 6000750

PACKING INFO

MASTER DIMENSIONS: 460X435X385 MM / 18.3X17.1X15.1 IN

GROSS WEIGHT: 16.76 KG / 36.9 LB MASTER PIECES: 1 PCS

TITAN PORTABLE PARTY

► 500W RMS



- The TITAN is a complete portable party music system. With lights effects, battery included, Bluetooth® connection. You can take the party control and enjoy your music as never before.

SPECIFICATIONS

Audio system	Digital EQ
Dynamic Microphone and cable included	Woofer 10"
Powered by rechargeable battery	Tweeter 2x3"
Bluetooth® connectivity	Line input
Aux input	Headphone output
2 Microphone inputs	



2 MICROPHONE
INPUT



CHROMATIC
LIGHTS



DIGITAL
EQ



10" WOOFER

POWERED BATTERY

 **Bluetooth®**



SHOCK 6 II

PORTABLE AUDIO

▶ 40W RMS

- The street power!!
With Bluetooth® and battery included, digital EQ and mic incorporated. USB Charging Input. / Will be the voice in streets!



POWERED BATTERY

6.5" WOOFER



SPECIFICATIONS

Audio system	Microphone and guitar inputs
Dynamic Microphone and cable included	Digital EQ
Powered by rechargeable battery	Woofer 6.5"
40W RMS	Tweeter 2"
400W PMPO	Line input
Bluetooth® connectivity	Recording mode
	Headphone output



Cod. 6000762

PACKING INFO

MASTER DIMENSIONS: 448X230X308 MM / 17.6X9X12.1 IN
GROSS WEIGHT: 20 KG / 44 LB MASTER PIECES: 4 PCS

SHOCK 26 PORTABLE AUDIO

▶ 60W RMS

- Audio system / Dynamic Microphone and cable included / Powered by rechargeable battery / Bluetooth connectivity / Microphone and guitar inputs / Digital EQ / Woofer 2 x 6.5" / Tweeter 2" Line input.

2X6.5" WOOFER

POWERED BATTERY



SPECIFICATIONS

Audio system	Digital EQ
Dynamic Microphone and cable included	Woofer 6.5"
Powered by rechargeable battery	Tweeter 2"
60W RMS	Line input
Bluetooth® connectivity	Recording mode
Microphone and guitar inputs	Headphone output



PACKING INFO

MASTER DIMENSIONS: 582X476X637 MM / 22.9X18.4X25.1 IN
GROSS WEIGHT: 22.2 KG / 48.9 LB MASTER PIECES: 4 PCS

Cod. 6000760

X-BLAST PORTABLE PARTY

► KARAOKE

- The X-Blast... is the ultimate portable audio system. LED lights effects brings amazing shine to your party and wireless streaming allows you to control the party from your smartphone. Take the control with X-Blast.



SPECIFICATIONS

Woofer: 2x8"	MIC & Guitar Input
Audiorhythmic light effects	Wireless microphone included
Lithium battery	Remote control included
Bluetooth®	Aux Input



Cod. 6000913



PACKING INFO

MASTER DIMENSIONS: 300X240X640 MM / 11.8X240X25.19 IN
GROSS WEIGHT: 4.55 KG / 10 LB MASTER PIECES: 1 PCS

LIGHT X PORTABLE AUDIO SYSTEM

▶ 300W RMS



Cod. 6000757

- The Light-x is the ultimate portable audio system. Led lights effects brings amazing shine to your party and wireless streaming allows you to control the party.



SPECIFICATIONS

Audio system	Digital EQ- Woofer 2x5"
Dynamic Microphone and cable included	Tweeter 2x1.5"
Powered by rechargeable battery	Line input
Bluetooth® connectivity	Headphone output
2 Microphone inputs	USB 5V output (only charge function)

PACKING INFO

MASTER DIMENSIONS: 582X476X637 MM / 22.9X18.4X25.1 IN
GROSS WEIGHT: 22.2 KG / 48.9 LB MASTER PIECES: 4 PCS

HNK-500BT

TWS EARPHONES

▶ WIRELESS



TWS WIRELESS EARPHONES
WITH CHARGING BOX



TOUCH PAD
CONTROL



HANDS-FREE
PHONE CALL



14HRS. WITH
CHARGING CASE



COMFORTABLE
MOST EARS



4HS OF
PLAYTIME

Cod. 6000251

PACKING INFO

MASTER DIMENSIONS: 295X200X275 MM / 11.6X7.87X10.08 IN
GROSS WEIGHT: 2.5 KG / 5.5 LB MASTER PIECES: 24 PCS

ADVENTURE

PORTABLE AUDIO SPEAKER

▶ 120W

SPECIFICATIONS

Audio system	Digital EQ
Dynamic Microphone and cable included	Woofer 5,25"
Powered by rechargeable battery	Tweeter 1.5"
Bluetooth® connectivity	Line input
Microphone and guitar inputs	Power: 120W RMS



COMPATIBLE WITH BLUETOOTH DEVICES



Cod. 6000748

PACKING INFO

MASTER DIMENSIONS: 500X335X325 MM / 19.68X13.2X12.8 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 12 PCS



SHOT 4 PORTABLE SPEAKER

▶ 2X4W

 **Bluetooth®**



Cod. y. 6000735 / Cod. bl. 6000736 / Cod. vr. 6000737 / Cod. gn. 6000738 / Cod. 6000727

SPECIFICATIONS

Portable Bluetooth® speaker works with most Bluetooth® enabled devices	Volume +/- control
Built-in 1800mAh lithium battery	Previous track/next track control
Built-in TF card reader	With AUX input function to work with non-Bluetooth® devices
Built in microphone for hands-free phone calls	



PACKING INFO

MASTER DIMENSIONS: 270X270X215 MM / 10.6X10.6X8.4 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 10 PCS



UP TO 6 HS
OF PLAYTIME

 **Bluetooth®**

COMPATIBLE WITH



ANDROID

IPHONE

TABLETS

Cod. 6000721

XBOOM PORTABLE SPEAKER

▶ 2X5W

SPECIFICATIONS

Bluetooth® version 4.2	Playback time 4-6hours
Speaker output power 2x5w	Charging port USB DC charging
Frequency response 150Hz-20kHz	Charging time Approx 3 hours
Microphone sensitivity -40db	Unit size 130x130x280mm
Built-in lithium battery 1200mAh	



PACKING INFO

MASTER DIMENSIONS: 595X355X225 MM / 23.4X13.9X8.8 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 4 PCS

FOCUS TOUCH CONTROL LED LAMP

▶ 4W

SPECIFICATIONS

Bluetooth®	Aux in
Touch controlled LED	Portable
Audiorhythmic	Battery
Hands-free phone call	Compatible with Android™ & iPhone®
6 colours	USB charging
8 light modes	

UP TO **6** HS
OF **6** PLAYTIME



Cod. 6000722



Bluetooth®

START XL PORTABLE SPEAKER

▶ 2X4W

SPECIFICATIONS

High quality sound and excellent bass
Hands-free phone call
Line-In function
Bluetooth®: 4.2
Output power: 7W
Rechargeable lithium battery: 1200mAh



PACKING INFO

MASTER DIMENSIONS: 505X340X240 MM / 19.4X13.3X9.4 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 6 PCS



Cod. g. 6000734 / Cod. r. 6000732 / Cod. 6000725



Bluetooth®

BEAT XL PORTABLE SOUND SPEAKER

▶ 2X4W



Cod w. 6000730 / Cod r. 6000731

SPECIFICATIONS

Portable Bluetooth® Speaker

Hands Free Phone Call

Aux In Function

Output Power: 2x4w

Rechargeable Lithium Battery: 1200mah



 **Bluetooth®**

 **3 COLORS AVAILABLE**

PACKING INFO

MASTER DIMENSIONS: 440X435X240 MM / 17.3X17.1X9.4 IN

GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 8 PCS

CHRONOS DIGITAL ALARM

▶ 3W



Cod. 6000726

6 **6HS OF PLAYTIME**
HS

SPECIFICATIONS

Bluetooth®

Speaker output - 3W

Power Input - DC 5V

Play time - About 2-6 hours

Charging Time - 4-5 hours

Built-In Rechargeable Battery - 1200mAh



CLOCK 
SPEAKER

 **Bluetooth®**

PACKING INFO

MASTER DIMENSIONS: 440X435X240 MM / 17.3X17.1X9.4 IN

GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 8 PCS

CONSTELLATION PORTABLE LED SPEAKER

▶ 5W



 **Bluetooth®**



COMPATIBLE WITH BLUETOOTH DEVICES

SPECIFICATIONS

Bluetooth®	8 light modes
ConnectLink® Technology	Aux in
Audiorhythmic	Portable
5 colours	Battery powered

**UP TO 6 HS
OF PLAYTIME**



CONNECTLINK® TECHNOLOGY

**7 LIGHT
MODES**


PACKING INFO

MASTER DIMENSIONS: 425X295X275 MM / 16.7X11.6X10.8 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 12 PCS

AURORA PORTABLE LED SPEAKER

▶ 2X4W

UP TO **6** HS
OF **6** PLAYTIME

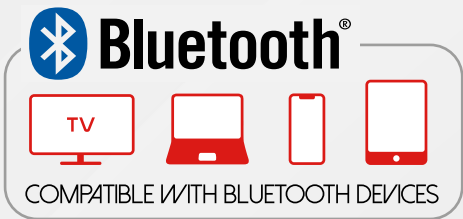

SPECIFICATIONS

Bluetooth®	7 light modes
ConnectLink® Technology	Aux in
Authorhythmic	Portable
Hands-free phone call	Battery powered
5 colours	USB charging

Cod w. 6000737

CONNECTLINK® TECHNOLOGY

7 LIGHT
MODES



PACKING INFO

MASTER DIMENSIONS: 430X325X190 MM / 16.9X12.7X7.48 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 12 PCS

START XL SMART BLUETOOTH SPEAKER

▶ 15W



AUX
INPUT



PORTABLE
SPEAKER



HANDS-FREE
PHONE CALL



FULL BASS
EXPERIENCE



Bluetooth®

COMPATIBLE WITH BLUETOOTH DEVICES



VOICE ASSISTANT FUNCTION
PORTABLE BLUETOOTH SPEAKER

SPECIFICATIONS

High quality sound

Bluetooth®

Excellent bass

Output power: 15 W

Hands-free phone call

Rechargeable lithium battery: 1800mAh

AUX input



4 COLORS AVAILABLE



UP TO 6 HS
OF PLAYTIME

Cod b. 6000743 / Cod G. 6000744 / Cod BL. 6000745 / Cod R. 6000746

PACKING INFO

MASTER DIMENSIONS: 510X340X240 MM / 20.07X13.3X9.44 IN

GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 6 PCS

AION DIGITAL CLOCK SPEAKER

▶ 2X4W



Cod. 6000741



Bluetooth®

COMPATIBLE WITH BLUETOOTH DEVICES

SPECIFICATIONS

Bluetooth®	About 2-6 hours
Hand free phone call	Charging time -
Speaker output - 3W	About 4-5 hs
Power input - DC 5V	Built-In rechargeable
Play time	battery - 1200mAh

UP TO 6 HS
OF **6** PLAYTIME

2 ALARMS
MODES

PACKING INFO

MASTER DIMENSIONS: 440X435X240 MM / 17.3X17.1X9.4 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 8 PCS

LIGHTSHOW LED LAMP SPEAKER

▶ 2X5W



BATTERY
RECHARGEABLE



HANDS-FREE
PHONE CALL



AUX.
INPUT



FAST
CHARGE

UP TO **6** HS
OF PLAYTIME

COMPATIBLE WITH



ANDROID



IPHONE



TABLETS

SPECIFICATIONS

Colorful Led light dancing to rhythm of music

Great button feeling

Built-in hands free microphone

Built in 3.5mm Aux inputs

Bluetooth®: 4.2

Output power: 2x3W

Rechargeable lithium battery: 1800mAh

Unit Size: 92*92*219mm



 **Bluetooth®**



Cod. 6000728

PACKING INFO

MASTER DIMENSIONS: 345X255X280 MM / 15.5X10X11 IN

GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 6 PCS

GLOW LED LAMP SPEAKER

▶ 10W



**UP TO 6 HS
OF PLAYTIME**



SPECIFICATIONS

Bluetooth® Version: 5.0	Charging Time: About 2-3 hours
Working distance: Up to 10 meters in open space	Built-In Rechargeable
Speaker output: 10W Power	Battery: 1200mAh
Input: DC 5V	Drive: Support up to 32GB
Play time: About 3-6 hours	Unit Size: 95x95x180 mm



**7 LIGHT
MODES**



PACKING INFO

MASTER DIMENSIONS: 425X285X255 MM / 16.7X11.2X10.03 IN
GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 6 PCS

W-CHARGE BLUETOOTH SPEAKER

▶ 2X7.5W



AUX
INPUT



PORTABLE
LAMP



BATTERY
RECHARGEABLE



Bluetooth®

COMPATIBLE WITH BLUETOOTH DEVICES



WIRELESS

8

LIGHT
MODES

SPECIFICATIONS

Bluetooth® version - 5.0

Bluetooth® Range - 33 feet (10m)

Play time - About 2-6 hours

Built-In Rechargeable Battery - 1800mAh

Charging Time - About 4-5 hours

USB Charging Port - 5V / 1A (Max)

Speaker power - 2x7.5 Watts



UP TO **6** HS
OF PLAYTIME

Cod. 6000747

PACKING INFO

MASTER DIMENSIONS: 500X335X325 MM / 19.68X13.2X12.8 IN

GROSS WEIGHT: 12.7 KG / 28 LB MASTER PIECES: 12 PCS

EARTHQUAKE DJ MIXING UNLIMITED

▶ 2700W RMS



**CROSSFADER
DJ**



**KEY
EFFECTS**



**2 DJ MIX
CHANNEL**

- **DJ PARTY SYSTEM**
The active loudspeaker EARTHQUAKE DJ is a true modern portable party audio system. This integrated system with powerfull and punchy bass, Bluetooth® connection, lights effects and DJ mixer will make your party epic.

SPECIFICATIONS

2 DJ mix channel	Ultra Bass Woofer 2x12"
DJ effects	X-BASS System
Auto DJ function	LED Display
Crossfader DJ	Audio rhythmic lights FX
MP3 Player - digital equalizer	

POWERED BATTERY

2X12" ULTRA BASS

THUNDER PORTABLE AUDIO

▶ 1800W RMS

SPECIFICATIONS

RMS Power 1800W	Tweeter 2x3"	Battery Life 6 hours
Frequency response: 20Hz - 20 KHz	Remote Control Battery 3V (2xAAA Batteries)	Dimensions (HxWxD) 36,8" x 14,8" x 12,6"
S/N ratio <70dB	Power Consumption 90W	Voltage AC 110V-220V - 60/50Hz
Sensibility 94dB	Woofer 2x10"	Speaker Battery 12V / 7Ah

Cod. 6000714

Cod. 6000710



**X-BASS
SYSTEM**

**REC FUNCTION
INCLUDED**

Bluetooth®

IMPACT ONE PORTABLE AUDIO

▶ 1200 RMS

- The IMPACT is the ultimate DJ system. The power in this system takes your party to the next level. Led light effects bring amazing shine to your party.

SPECIFICATIONS

RMS Power 1200W	Tweeter 2x3"	Power supply AC 110-220V~60/50Hz
Frequency response: 50Hz - 18KHz	Microphone inputs Unbalanced	Power Consumption 55W
S/N ratio <70dB	Wireless Microphones VHF	Speaker Battery 18V/4.5Ah
Sensibility 94dB	Wireless Microphone 3V (2xAA)	Battery life 6 hours
Woofer 12"	Remote Control 3V (2xAAA Batteries)	

IMPACT TWO PORTABLE AUDIO

▶ 1500 RMS

SPECIFICATIONS

RMS Power 1500W	Tweeter 2x3"	Power supply AC 110-220V~60/50Hz
Frequency response: 50Hz - 18KHz	Microphone inputs Unbalanced	Power Consumption 100W
S/N ratio <70dB	Wireless Microphones VHF	Speaker Battery 18V/4.5Ah
Sensibility 94dB	Wireless Microphone 3V (2xAA)	Battery life 6 hours
Woofer 2x12"	Remote Control 3V (2xAAA Batteries)	



Cod. 6000138

Cod. 6000139

2X3" TWEETER

2X12" WOOFER





IMPACT THREE PORTABLE AUDIO

▶ 1200W RMS

- Long life battery powered system, set your music when and where you like by the time you want. Wireless streaming allows you to control everything from your smartphone. You're the DJ, let's get the party started.

SPECIFICATIONS

RMS Power 1200W	Tweeter 2x3"	Power supply AC 110-220V~60/50Hz
Frequency response: 50Hz - 18KHz	Microphone inputs Unbalanced	Power Consumption 55W
S/N ratio <70dB	Wireless Microphones VHF	Speaker Battery 18V/4.5Ah
Sensibility 94dB	Wireless Microphone 3V (2xAA)	Battery life 6 hours
Woofer 12"	Remote Control 3V (2xAAA Batteries)	

IMPACT FOUR PORTABLE AUDIO

▶ 1500W RMS

SPECIFICATIONS

RMS Power 1500W	Tweeter 2x3"	Power supply AC 110-220V~60/50Hz
Frequency response: 50Hz - 18KHz	Microphone inputs Unbalanced	Power Consumption 100W
S/N ratio <70dB	Wireless Microphones VHF	Speaker Battery 18V/4.5Ah
Sensibility 94dB	Wireless Microphone 3V (2xAA)	Battery life 6 hours
Woofer 2x12"	Remote Control 3V (2xAAA Batteries)	



2X3" TWEETER

2X12" ULTRA LOW

EXTREME-X PORTABLE PARTY

▶ 2200 RMS

- EXTREME SOUND... LEGENDARY PARTIES.
The active loudspeaker EXTREME X is a true modern portable party audio system.
This integrated system with powerfull and punchy bass, Bluetooth® conection and lights effects.

SPECIFICATIONS

P.M.P.O. 32700w	Sensibility 94dB	Power Consumption 90W
RMS Power 2200w	Woofer 2x10"	Speaker Battery 18V/4.5Ah
Freq response: 20Hz - 19KHz	Driver 1"	Battery Life 6 hours
S/N ratio <70dB	Remote Control 3V (2xAAA Batteries)	Power Supply 110-220V ~ 60/50Hz

INFINITY 8 PORTABLE PARTY

▶ 1000 RMS

- INFINITY 8 is a compact high-power system. With 1000W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Your music is the spotlight, INFINITY 8 will make everyone have fun.

SPECIFICATIONS

2-ways portable powered system	Compression Driver	Compact system for easy and
Operates on rechargeable battery	LED Display	comfortable transportation with
MP3 Player - USB/SD	Line Input (3.5mm)	handles at the front top and bottom
Woofer 2x8"	2-band EQ	



Cod. 6000711

Cod. 6000136



TWISTER 4 PORTABLE AUDIO

▶ 300W RMS

- **SMALL SIZE, BIG PARTIES**

You can not believe the power of this little great Twister 4. Your parties will not be the same again.

With Bluetooth® connection, USB/MicroSD inputs, AUDIORHYTHMIC LIGHTS FX and a complete panel control with exclusive Novik Neo design, you do not need anything else. Enjoy the music

SPECIFICATIONS

RMS Power 300W	Tweeter 2x1.5"	Output: DC 13V/2A
Frequency response: 55Hz - 20KHz	Remote Control Battery 3V (2xAAA Batteries)	Consumption 0.4A max
S/N ratio >85dB	Power supply Input: AC 110-240V~60/50Hz -	Speaker Battery 11,1V/1800mA
Sensibility 93dB		Battery Life (depending on the use)
Woofer 2x4"		5 hours



TWISTER 6 FUTURIST SOUND

▶ 600W RMS

- The TWISTER 6 is a complete music system. With a futuristic design, lights effects, DJ Jog Wheels, battery, Bluetooth® connection you can take the total control and enjoy your music as never before.

SPECIFICATIONS

RMS Power 600W	Tweeter 2x1.5"	Output: DC 15V/2A
Frequency response: 50Hz - 20KHz	Remote Control Battery 3V (2xAAA Batteries)	Consumption 36W
S/N ratio >70dB	Power supply Input: AC 110-240V~60/50Hz -	Speaker Battery 12V/4.5A
Sensibility 94dB		Battery Life (depending on the use)
Woofer 2x6.5"		4.5 hours



IMPACT DJ PORTABLE PARTY

▶ 2100W RMS

- IMPACT-DJ is the right product to organize the biggest party!
You can make everyone dance to the rhythm of the music Led light effects bring amazing shine to your party.

SPECIFICATIONS

RMS Power 2100w	Tweeter 2x3"	Remote Control Battery 3V (2xAAA)
Frequency response: 20Hz - 18KHz	Microphone inputs Unbalanced	Power supply AC 110V-220V - 60/50Hz
S/N ratio <70dB	Wireless Microphones VHF	Power Consumption 100W
Sensibility 95dB	Wireless Mic Battery 3V (2xAA)	Speaker Battery 18V/4.5Ah
Woofer 2x12"		

REACTOR DJ PORTABLE PARTY

▶ 2500W RMS

- The active loudspeaker REACTOR-DJ is a true modern portable party audio system, This integrated system with powerful and punchy bass, Bluetooth® connection, lights effects, party thruster and 2 DJ MIX.

SPECIFICATIONS

RMS Power 2500w	Driver Mid-high speaker 4"	Speaker Battery 12V / 7 Ah
Frequency response: 20Hz - 20KHz	High frequency tweeter 1"	Battery Life (depending on the use)
S/N ratio <70dB	Remote Control Battery 3V (2xAAA)	6 hours
Sensibility 94dB	Batteries)	Dimensions (HxWxD) 47x16x15in
Woofer 2x12"	Power Consumption 250W	Power Supply 110/220V~60/50Hz



Cod. 6000717

Cod. 6000716



Bluetooth®

ULTIMATE PORTABLE AUDIO

▶ 33400W



Cod. 5303313



 **Bluetooth®**



COMPATIBLE WITH BLUETOOTH DEVICES



MULTI FUNCTION DIGITAL JOG WHEELS

- Are you ready for the ULTIMATE sound? You can't stop playing your music throughout the party, now you can charge your phone while playing music with Bluetooth connectivity.



USB PLAYER



CHROMATIC LIGHTS



REMOTE CONTROL



USB CHARGE



LIGHT CONTROLLER WHEEL



MICROPHONE FX



2 MICROPHONE INPUT



MULTIFUNCTION DISPLAY

SPECIFICATIONS

2-way loudspeaker party system	Digital EQ
Multi function digital jog wheels	USB-charge
Multi-color led lights	USB media player
X-bass system	2x high frequency drivers
2-microphone inputs	2x low frequency woofers
Echo and delay FX system	Rugged handles and wheels for easy transport



NOVIK
NEO

DESIGNED IN USA

WWW.NOVIKNEO.COM